



DAMESA

I N D U S T R I E S

GLAZING CATALOGUE

2ND EDITION 2021

TABLE OF CONTENTS

SECURITY DOOR HARDWARE

HINGED DOOR	2-5
SLIDING DOOR	6-8

RESIDENTIAL DOOR HARDWARE

HINGED DOOR	9-10
SLIDING DOOR	11-13

COMMERCIAL DOOR HARDWARE

MORTICE LOCKS	14-15
PLATE FURNITURE	16-19
LOCKWOOD MORTICE LOCK KITS	20
COMMERCIAL GLAZING ACCESSORIES	21
EGRESS HARDWARE	22
DOOR CLOSSERS & FLOOR SPRINGS	23

SEALS

WOOL PILE	24
DOOR SEALS	25

WINDOW HARDWARE

LOCKS, CATCHES & STAYS	26
CHAINWINDERS	27
SPIRAL SASH BALANCES	28-29
BREEZWAY LOUVRES	30-37

CONSUMABLES

GENERAL CONSUMABLES	38-39
SILICONES, SEALANTS & ADHESIVES	40-41
WEDGE, CHANNEL & SETTING BLOCK	42
TAPES	42-43
HINGES	43
FLYSCREEN MESH	44-45
DAPA SPLINE & DAMPCOURSE	46
CHEMICALS & AEROSOLS	46-47
ROLLERS & CORNER STAKES	48-49


TOOLS & ACCESSORIES

GLAZING TOOLS	50-51
PPE	52
DRILL & DRIVER BITS	52-55


HINGED SECURITY DOOR HARDWARE



Elegance XC

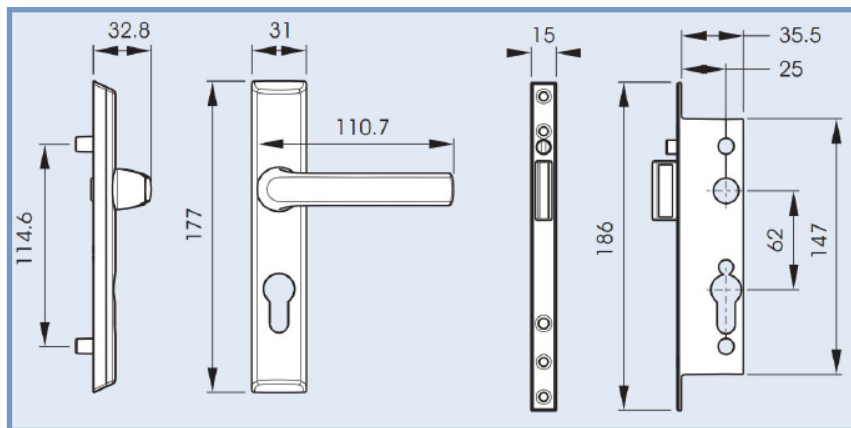

Ultimate XC

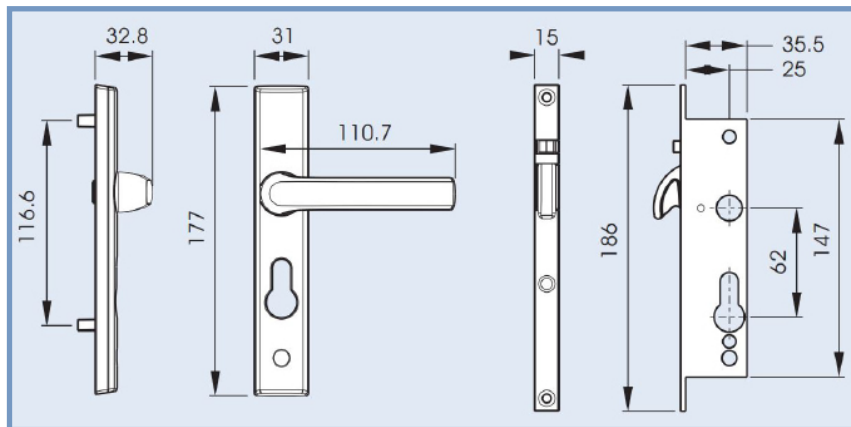

Austral Colour Range:



Black



White




Primrose



Stone Biege



Silver



White Birch



Brown

**Available in other colours upon request, typically 10-15 business day lead time for non-stocked colours.

Austral 5 Pin Cylinder



Available Keyed Alike & Keyed to Differ

Austral Security Door Closer




Available in any of the Austral colour range

Elegance 3 point locking kit



Type	[A]	[B]
High Kit	682mm	826mm
Low Kit	826mm	682mm
Pool Kit	375mm	961mm

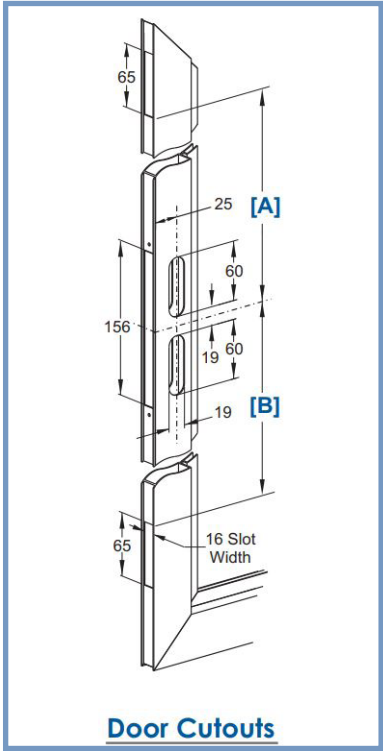


Ultimate 3 point locking kit




Type	[A]	[B]
High Kit	682mm	826mm
Low Kit	826mm	682mm
Pool Kit	375mm	961mm



Tasman MkII

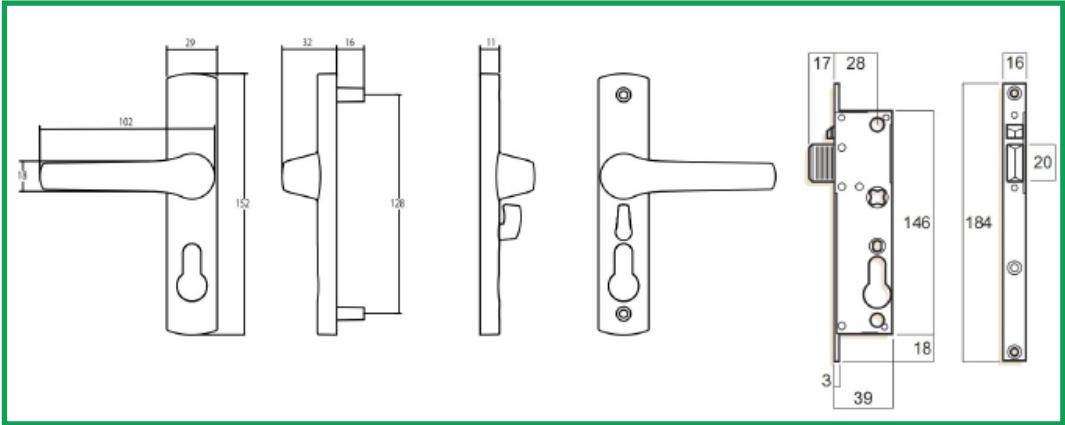


Whitco 5 Pin Cylinder

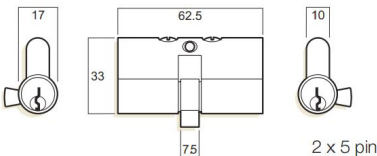

Available Keyed Alike & Keyed to Differ

LWD 8654

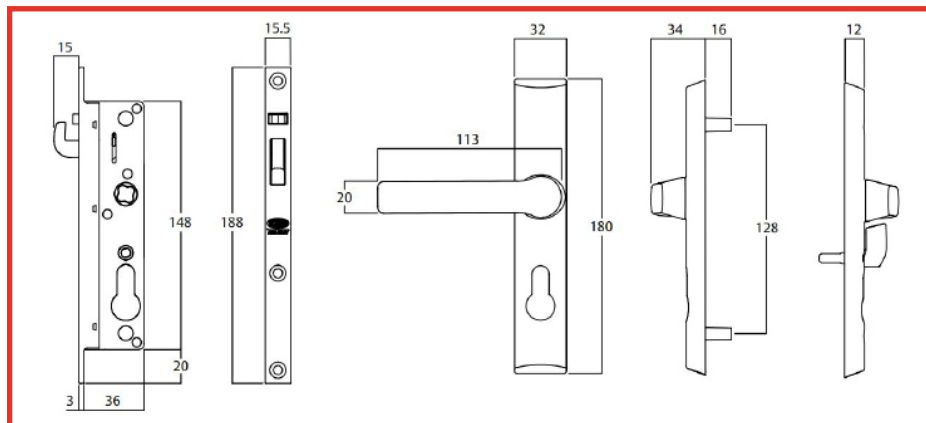

Lockwood Colour Range:



Black



White



Primrose



Stone Biege



Silver




Brown


**Available in other colours upon request, typically 10-15 business day lead time for non-stocked colours.

Lockwood 8654 Three Point Lock Kits


8654-3PK

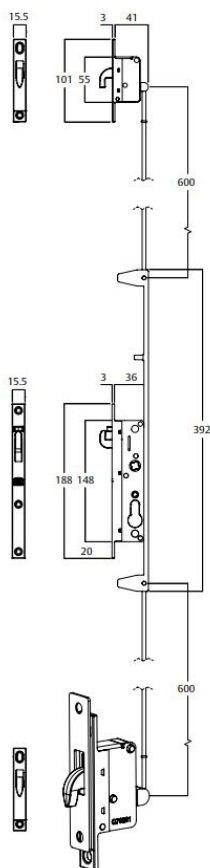



8654-3PK/HS

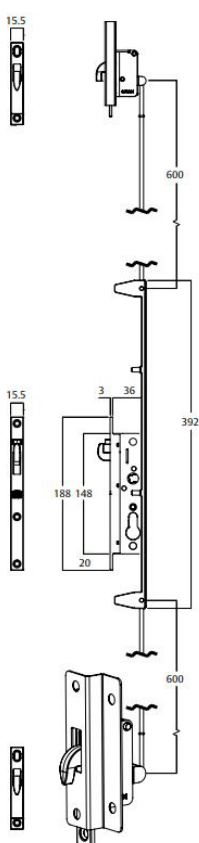

8654-3PK/PBT

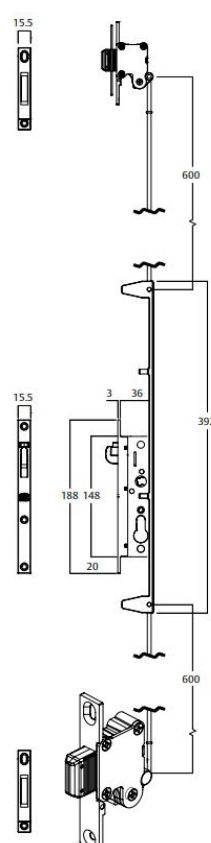

Lockwood 5 Pin Cylinder





Available Keyed Alike & Keyed to Differ

Whitco Security Hinge

Without Prong

With Prong

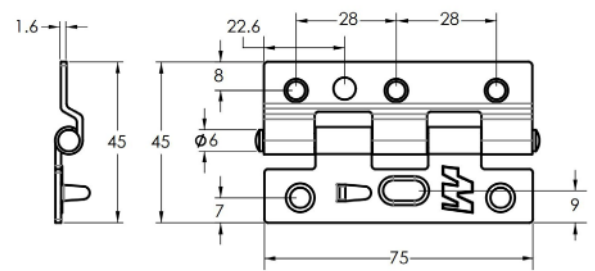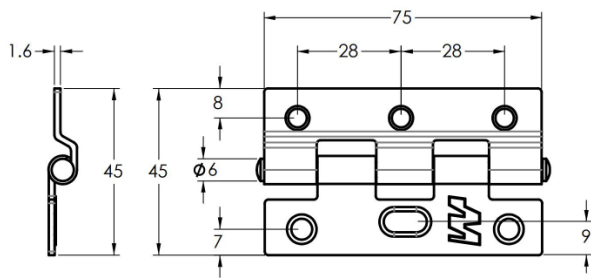

Available Colours:



Black



White



Primrose



Stone Biege



Silver



White Birch



Brown

Security Hinge Packer



2 Available Sizes:

1mm x 75mm

2mm x 75mm

Petway Pet Doors



3 Sizes Available:

Small: Flap Size - 240mm high x 190mm wide.
Suitable for all size cats and small to medium size dogs.

Medium: Flap Size - 305mm high x 225mm wide.
Suitable for medium size dogs.

Large: Flap Size - 400mm high x 260mm wide.
Suitable for large size dogs.

Available Colours:



Black



White



Primrose



Stone Biege





Brown

Hinged Security Door Catalogues



SLIDING SECURITY DOOR HARDWARE

Sliding Security Door Catalogues

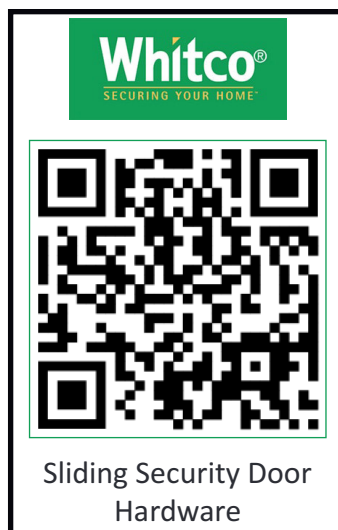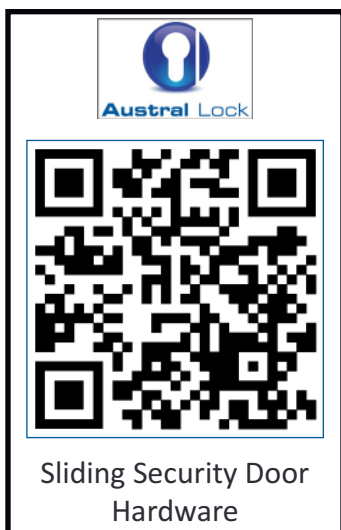

Inventco Water Filled Sliding Door Closer



Black



White



Clear Anodized



Primrose



Stone Biege




Brown

Installation Video



Scan Here


SD7

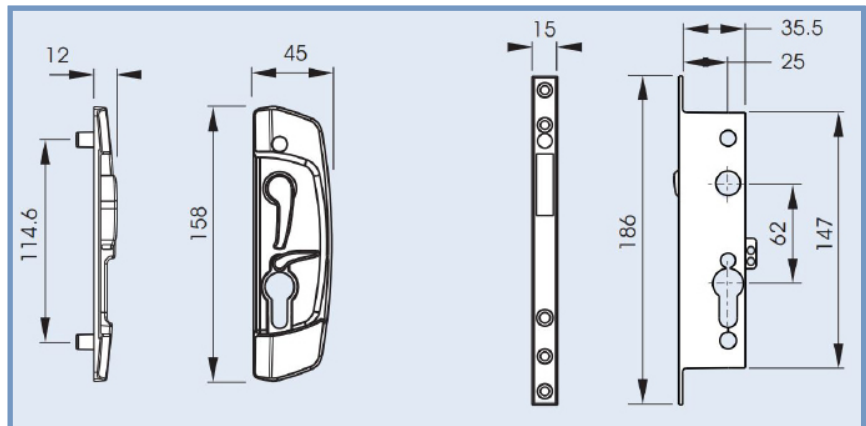

SD14 3 point locking kit (suits SD7)



Type	[A]	[B]
High Kit	546mm	961mm
Low Kit	961mm	546mm
Pool Kit	375mm	961mm

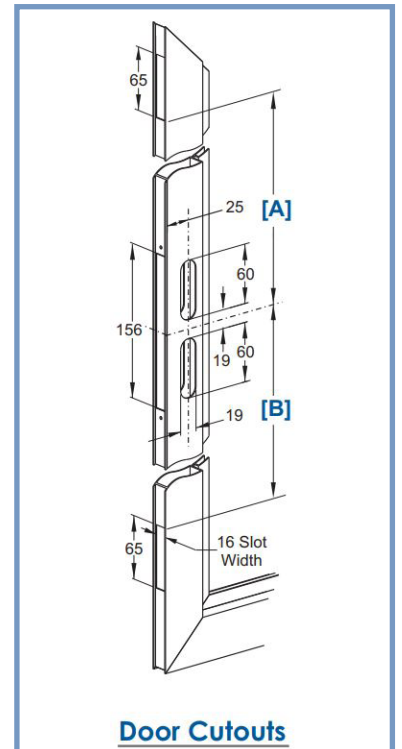

Austral 5 Pin Cylinder



Available Keyed Alike & Keyed to Differ

Austral Colour Range:



Black



White



Primrose



Stone Biege



Silver




White Birch




Brown

**Available in other colours upon request, typically 10-15 business day lead time for non-stocked colours.


Leichhardt

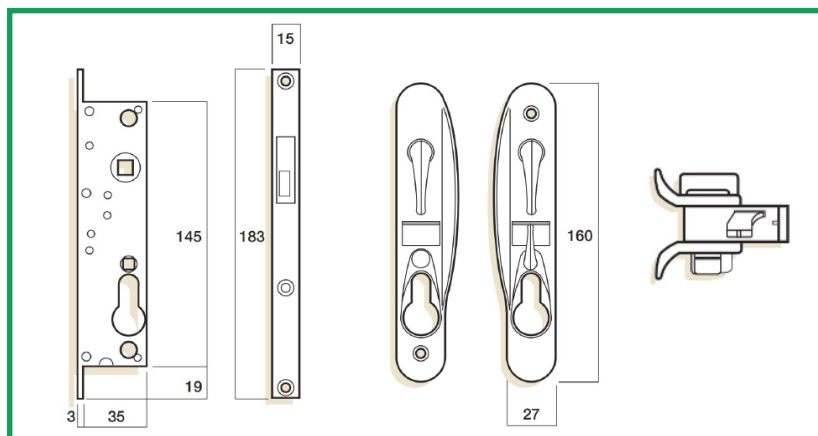

Whitco Bass Latch




Whitco 5 Pin Cylinder

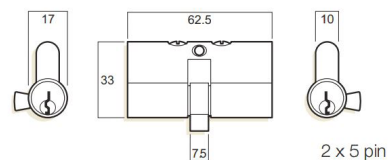

Available Keyed Alike & Keyed to Differ



LWD 8653

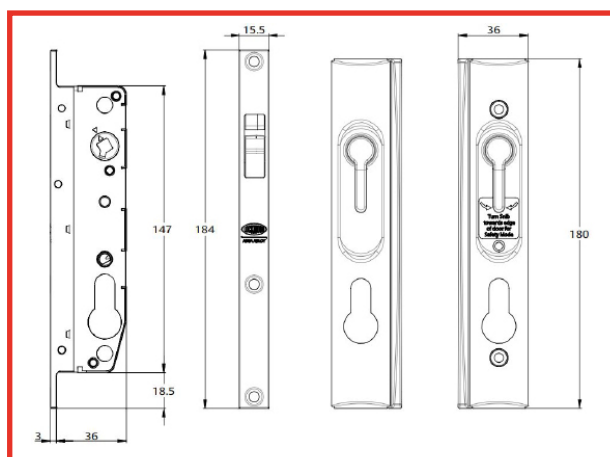

Lockwood Colour Range:



Black



White



Primrose



Stone Biege



Silver




Brown


**Available in other colours upon request, typically 10-15 business day lead time for non-stocked colours.




Optimum Mortice Lock

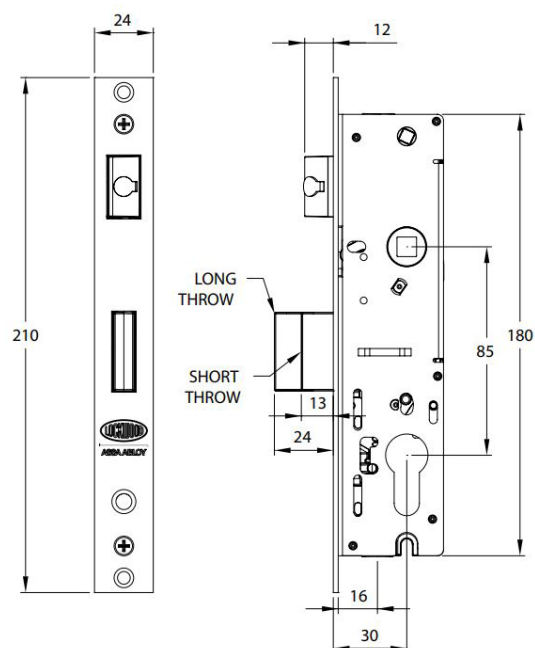


Optimum Roller Bolt

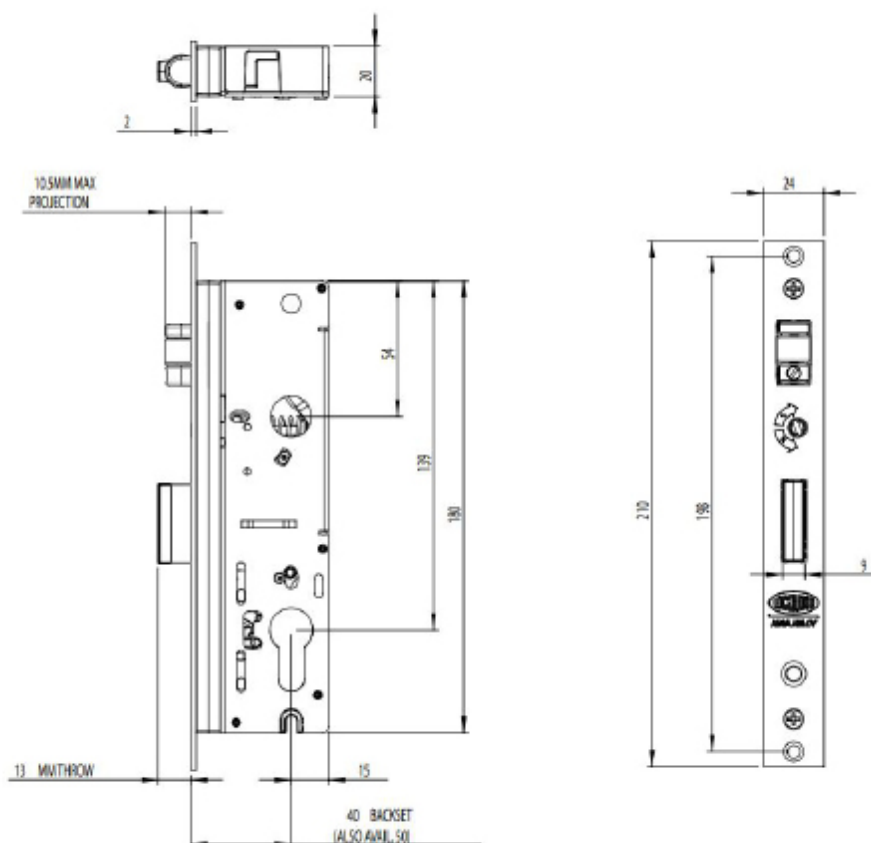

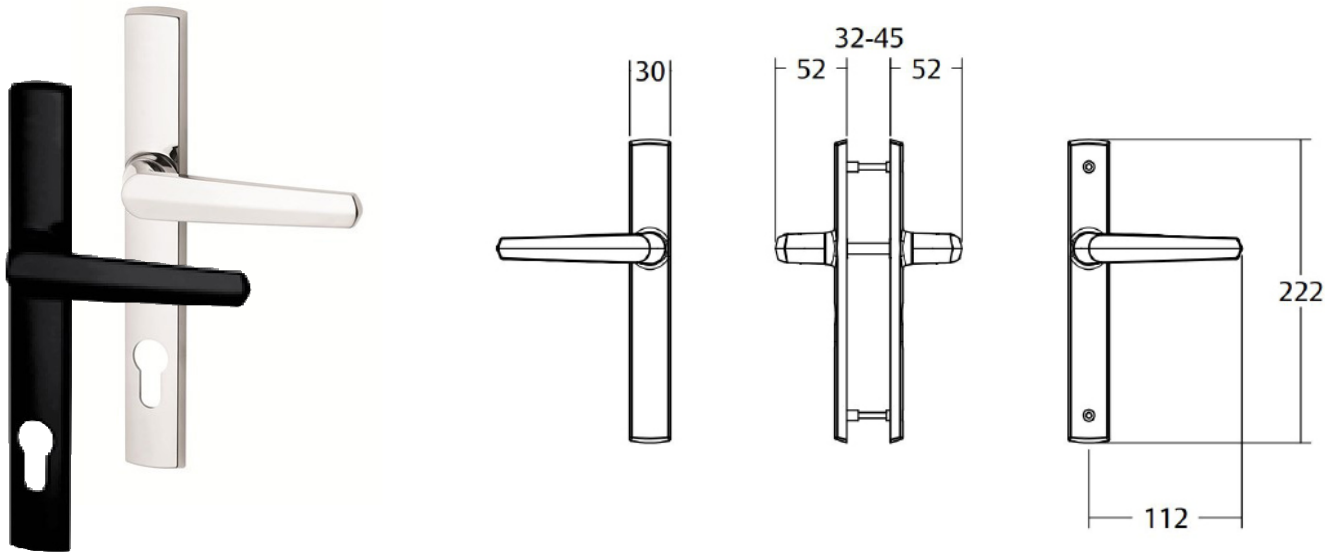


Optimum Strike

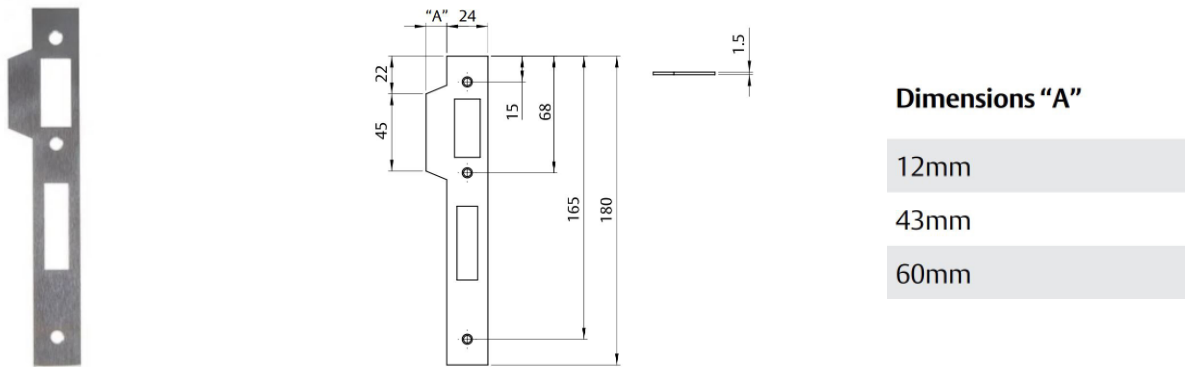

Dimensions "A"

- 12mm
- 43mm
- 60mm

Optimum Roller Bolt Strike

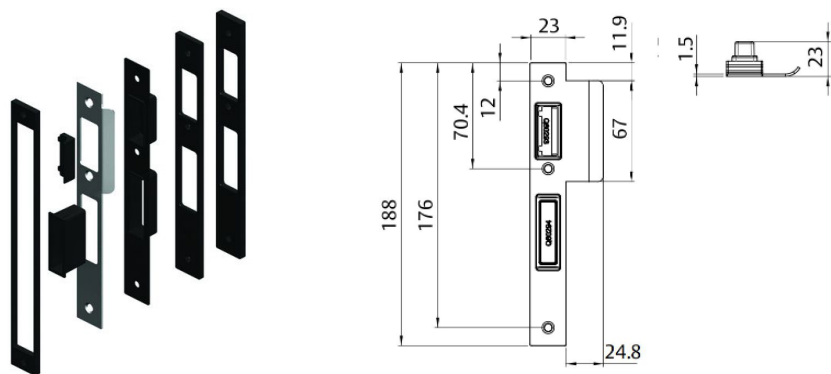

LOCKWOOD

ASSA ABLOY


Optimum Mortice Locks

LOCKWOOD

ASSA ABLOY


Palladium Door Furniture

Sliding Door Capping Track

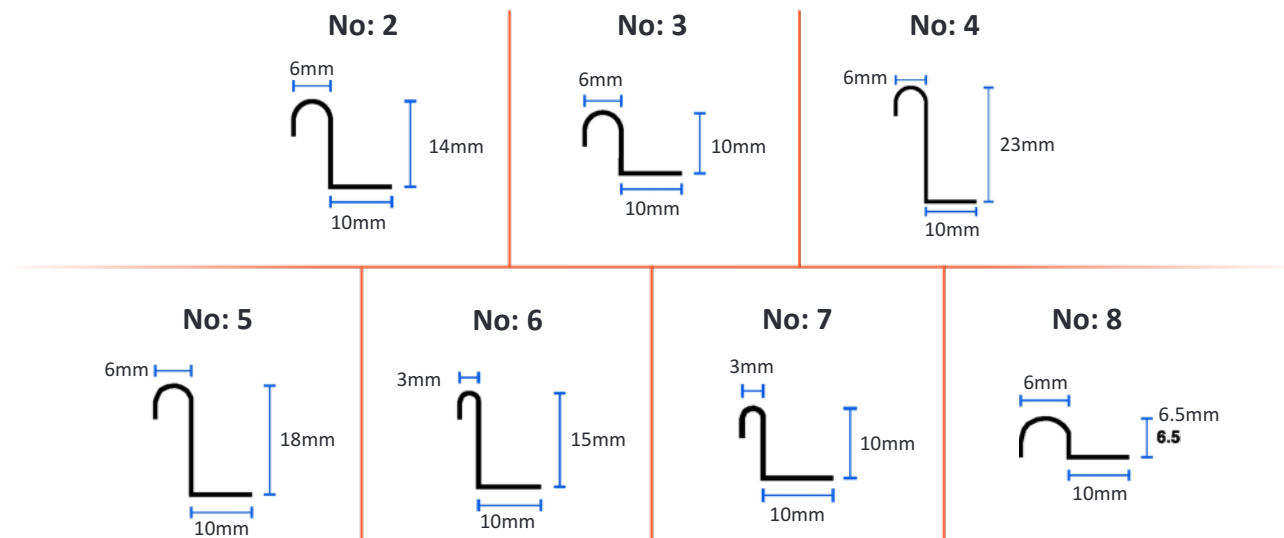


Capping Track is used to repair worn or damaged sliding door tracks. It comes in lengths of 2.4m long to suit the majority of sliding door applications and is made out of 304 grade stainless steel.

Transcat Pet Doors




Cat Door Dimensions

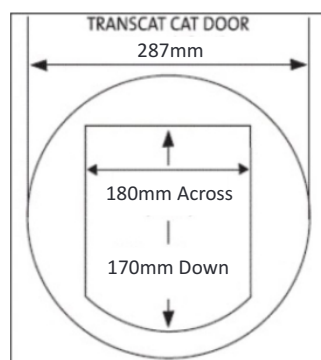


Glass Cutout:
267mm (Single Glazed)
275mm (Double Glazed)

Dog Door Dimensions

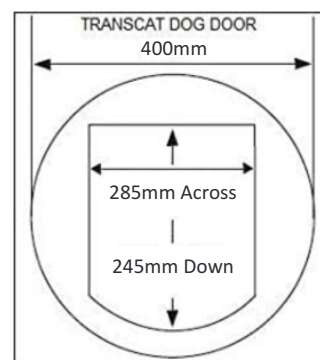

Glass Cutout:
385mm (All Applications)




Yarra Ridge

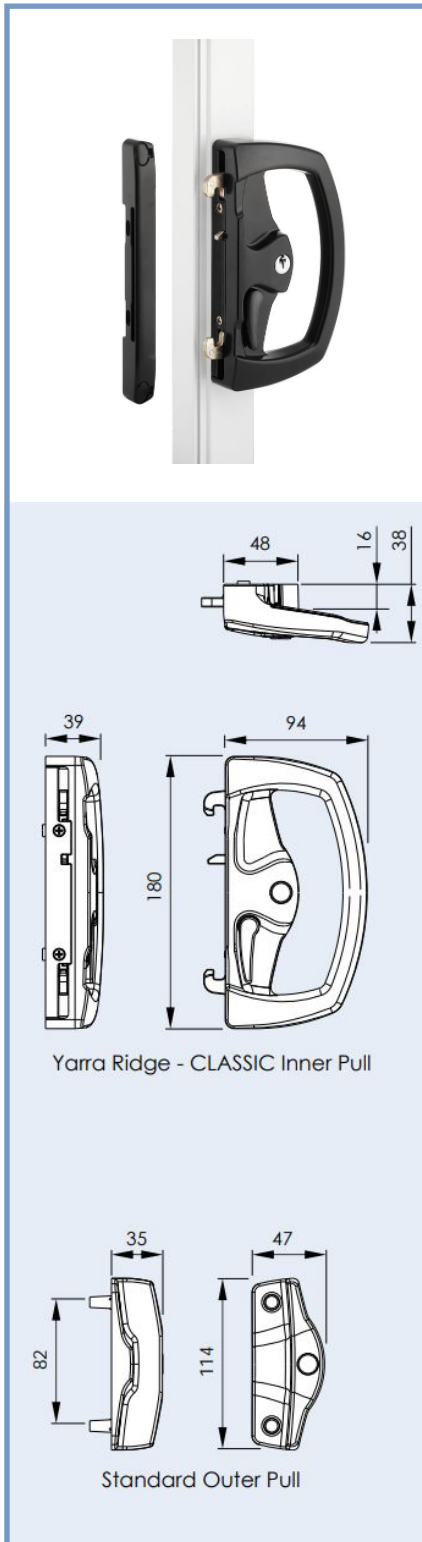


Yarra 5 Pin Cylinders



Available with either a
16mm or 25mm Strike

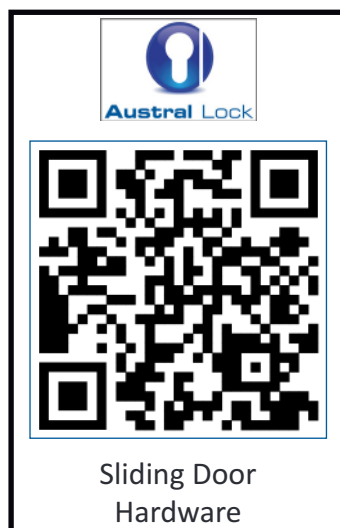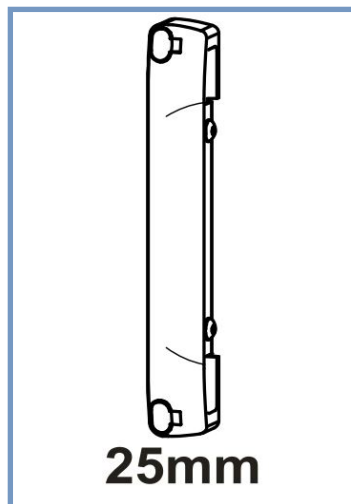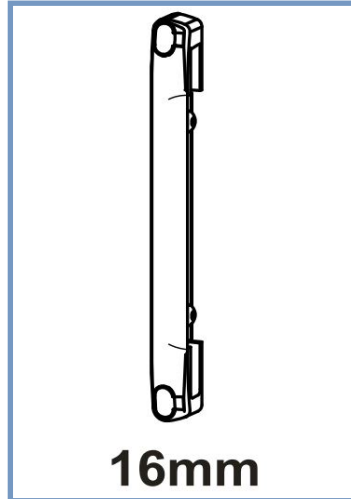


Yarra View

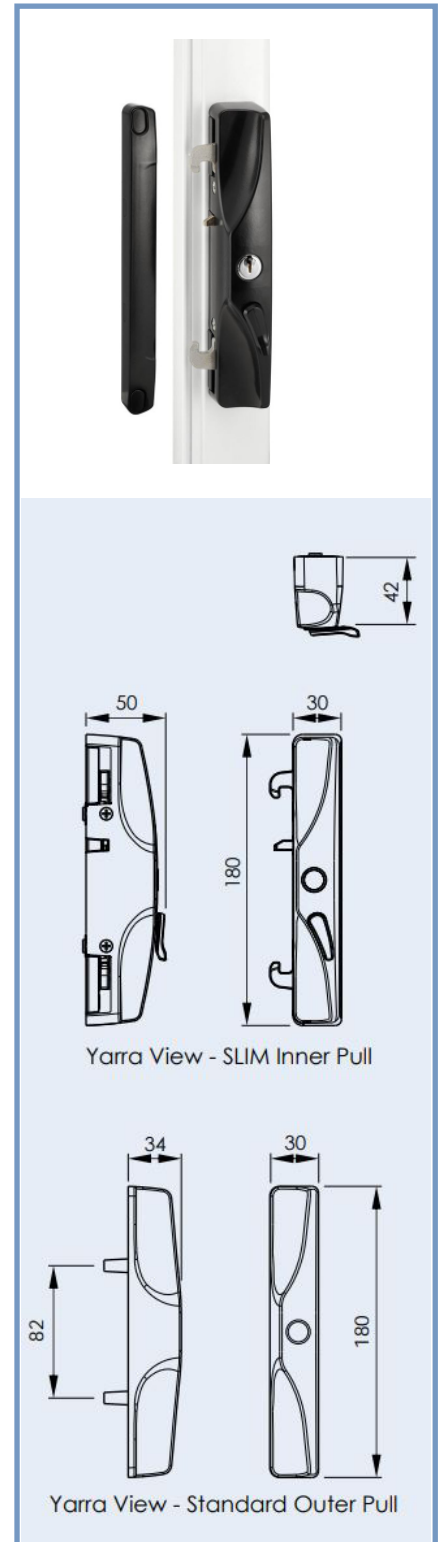

*** Does NOT include cylinders**

Blaxland

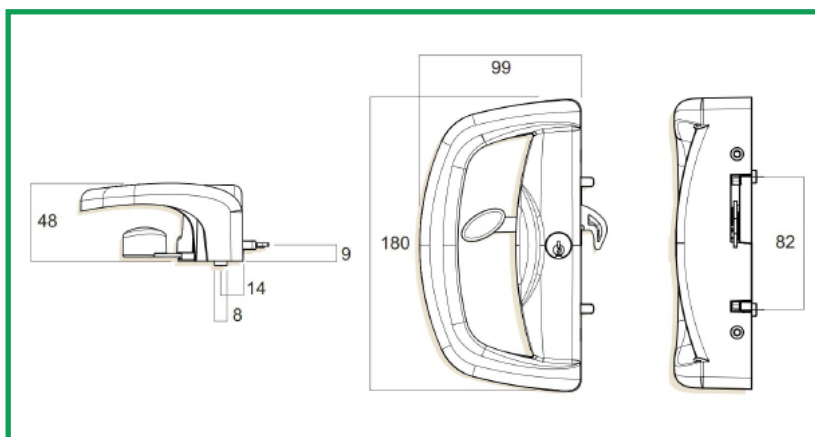


Features & Specifications:

- Surface Mounted.
- Meets Australian Lock Standard AS4145.2 - 2008 S4 & D8.
- Standard 82mm fixing holes.
- Central turnbar hole for external cylinders.
- Integral anti-lift pins to resist attempts to lift the door out of its track.
- Non-handed
- Adjustable stainless steel locking beak, with 6mm of closing adjustment.
- Self retracting beak avoids damage and accidental lockout.
- Suitable for use with a wide range of outer pulls and strikes.

Keying:

- Blaxland uses C4 5 pin cylinders as standard, and can be keyed alike to other C4 and CYL4® Whitco and Lockwood products.

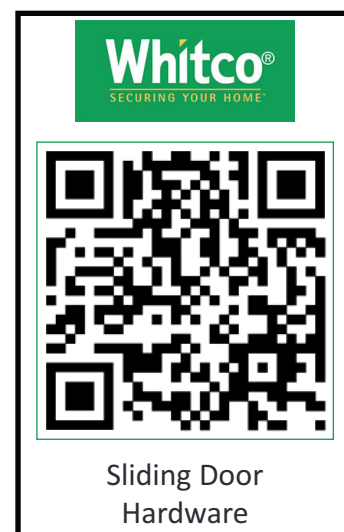

Newstar Sliding Door Closer



Features:


- Can be fitted to existing doors with the help of just five screws. Mounts onto aluminum, steel or timber.
- Suitable for heavier security doors.
- No electric power required.
- Unit suitable for left or right-hand operation.
- Closing power and speed adjustable.
- Door opens easily and closes automatically.
- Saves energy by making heating and airconditioning more effective.
- Powerful enough for all security doors and most glass doors.

* Only available in Black *

COMMERCIAL MORTICE LOCKS




Lockwood 3782

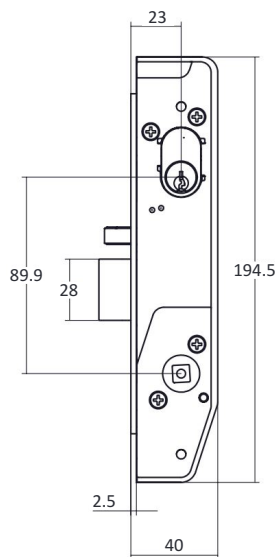


The new Selector® 3780 Series Mortice Lock was designed to incorporate the full range of lock functions into one primary lock. This reduces stock line items. All functions can be configured by adjusting the hub setting selector, anti-lockout selector as well as using cylinder cams and turn adaptors.

Lockwood 3772AF

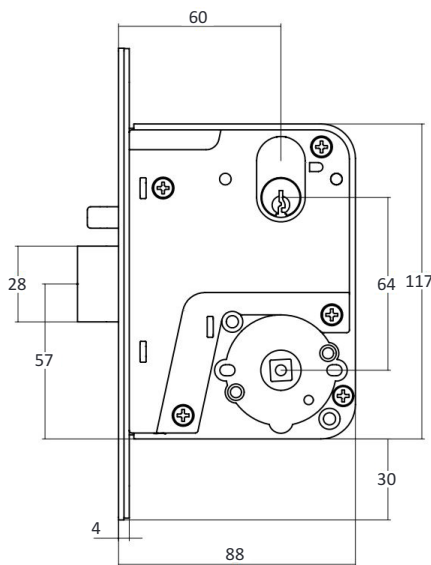


Specify the Selector® 3772-AFKIT for aluminium door fixing kit to convert a timber fix lock to suit aluminium door fixing. The aluminium door fixing kit comes with a 156mm by 25mm radius corner faceplate common to other aluminium door locks.

Lockwood 3541

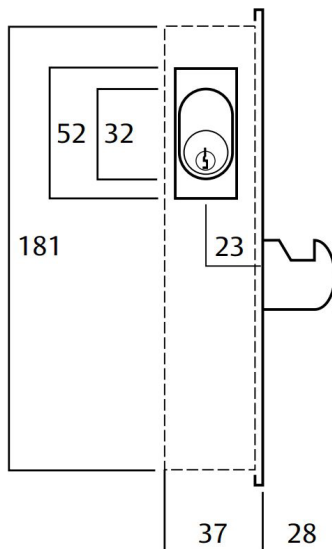

3541 Series Cylinder Mortice Deadlocks with 28mm Hook Bolt Sliding and swing door deadlock with a hooked deadbolt to engage and lock into a deadlatching or security strike when the bolt is in the thrown position. Features include unique 360° key rotation, rear lock and strike support for extra strength and security, positive deadlocking action and sintered stainless steel bolt. 30mm backset version is also available.



Lockwood 3542

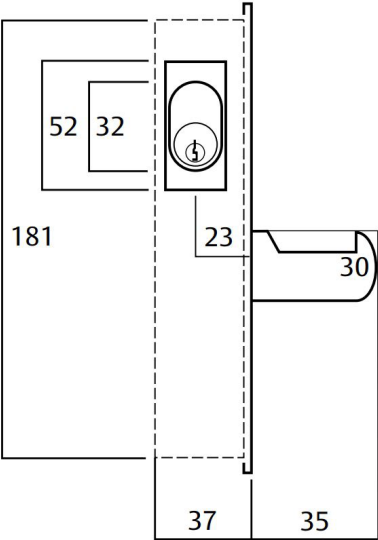



3542 Series Cylinder Mortice Deadlock with 35mm Hook Bolt. Swing door deadlock combining the quality features of the 3540 series with a 35mm deadbolt for deeper frames and improved security.



Yale Throw Bolt

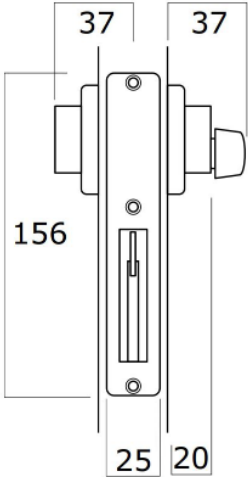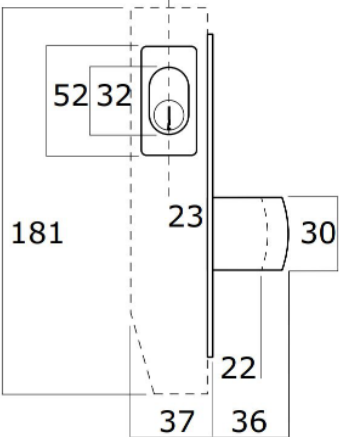

Yale Hook Bolt

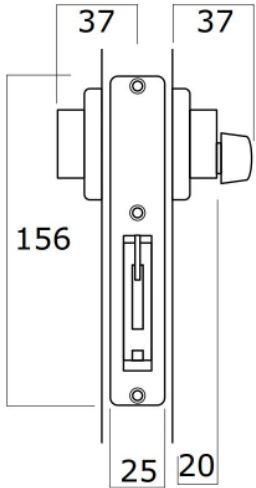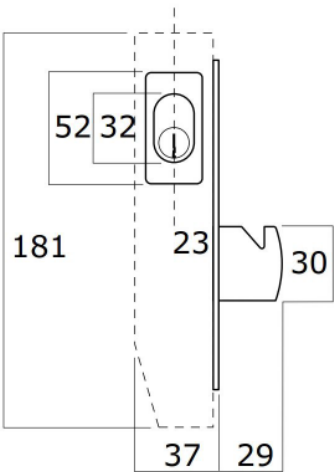


Lockwood 4900 Internal Plate Furniture

4900




Interior Plate
Square-end
Cylinder Only

4901




Interior Plate
Square-end
Cylinder & Lever

4904



Interior Plate
Square-end
Turnknob & Lever

4905



Interior Plate
Square-end
Lever Only

4906




Interior Plate
Square-end
Turnknob Only

4907




Interior Plate
Square-end
Plain Plate

4908




Interior Plate
Square-end Fixed
Lever & Cylinder

4909




Interior Plate
Square-end Fixed
Lever Only

4910




Interior Plate
Square-end
Two Cylinders

4911




Interior Plate
Square-end
Cylinder, Lever & Lens

4912



Interior Plate
Square-end
Lever & Lens

4916




Interior Plate
Square-end
Privacy Indicating
Turnknob & Lever

4919




Interior Plate
Square-end
Privacy Indicating
Emergency Turn
& Lower Cylinder

4939



Interior Plate
Square-end Disabled
Accessible Turnknob
& Lever







4941








Interior Plate
Square-end Privacy
Indicating Disabled
Accessible Turnknob
& Lever




Lockwood 4800 External Plate Furniture

4800	4801	4803	4805	4807	4808
					
Exterior Plate Square-end Cylinder Only	Exterior Plate Square-end Cylinder & Lever	Exterior Plate Square-end Emergency Turn & Lever	Exterior Plate Square-end Lever Only	Exterior Plate Square-end Plain Plate	Exterior Plate Square-end Fixed Lever & Cylinder

4809	4810	4811	4812	4814
				
Exterior Plate Square-end Fixed Lever Only	Exterior Plate Square-end Two Cylinders	Exterior Plate Square-end Cylinder, Lever & Lens	Exterior Plate Square-end Lever & Lens	Exterior Plate Square-end Privacy Indicating Emergency Turn & Lever

4900 & 4800 Plate Furniture Profile Measurements

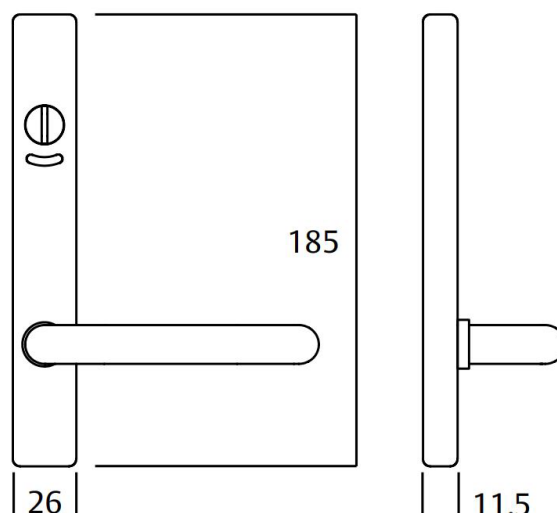

Lockwood 4900 Internal Plate Furniture

1900 1901 1904 1905 1906 1907 1908



Interior Plate
Cylinder Only



Interior Plate
Cylinder & Lever




Interior Plate
Turnknob & Lever



Interior Plate
Lever Only



Interior Plate
Turnknob Only



Interior Plate
Plain Plate




Interior Plate
Cylinder & Lever


1909 1920 1921 1922 1939* 1941*



Interior Plate
Fixed Lever




Interior Plate
Cylinder,
Lever & LED



Interior Plate
Cylinder, Fixed
Lever & LED



Interior Plate
Lever & LED





Interior Plate
Disabled
Turnknob & Lever



Interior Plate
Privacy Indicating
Disabled
Turnknob & Lever

1900 & 1800 Plate Furniture Profile Measurements



Lockwood 1800 External Plate Furniture

1800 1801 1803 1804 1805 1806



Exterior Plate
Cylinder Only



Exterior Plate
Cylinder &
Lever




Exterior Plate
Emergency
Turn & Lever



Exterior Plate
Turnknob
& Lever



Exterior Plate
Lever Only



Exterior Plate
Turnknob
Only

1807 1808 1809 1810 1813 1814




Exterior Plate
Plain Plate



Exterior Plate
Fixed Lever
& Cylinder



Exterior Plate
Fixed Lever



Exterior Plate
Dual Cylinder



Exterior Plate
Privacy Indicating
Emergency Turn



Exterior Plate
Privacy Indicating
Emergency
Turn & Lever

1815 1816 1820 1821 1822 1823



Exterior Plate
Privacy Indicating
Turnknob




Exterior Plate
Privacy Indicating
Turnknob & Lever



Exterior Plate
Cylinder,
Lever & LED



Exterior Plate
Cylinder, Fixed
Lever & LED



Exterior Plate
Lever & LED



Exterior Plate
Cylinder & LED

Plates and Functions Legend

Cylinder Hole



Fixed Lever



Indicating Turnknob



Turnknob



Disabled Turnknob



Indicating Emergency Turn



Emergency Turn



LED




Lever



COMMERCIAL DOOR MORTICE LOCK KITS

Lockwood Kit 01


4901



Interior Plate
Square-end
Cylinder & Lever



4801




Exterior Plate
Square-end
Cylinder & Lever



Lockwood Kit 04


4904



Interior Plate
Square-end
Turnknob & Lever



4801




Exterior Plate
Square-end
Cylinder & Lever



Lockwood Kit 05


4905



Interior Plate
Square-end
Lever Only



4801



Exterior Plate
Square-end
Cylinder & Lever



LOCKWOOD
ASSA ABLOY



3700 Series Mortice
Lock Catalogue

LOCKWOOD
ASSA ABLOY



3540 Series Mortice
Lock Catalogue

Yale



Mortice Throw Bolt
Catalogue

COMMERCIAL GLAZING ACCESSORIES

Glass Decals



- Silver Bar



- AWS




- Pilkington



- Dowell


* Available in 500mm Strips or 10M rolls



- 75mm Visually Impaired Decal


* Available in Frosted White and Frosted Silver. Only available in a 10M roll.

Back to Back Pull Handles



A - 300mm
B - 32mm
C - 50mm
D - 100mm

Flush Bolts - Aluminium Doors

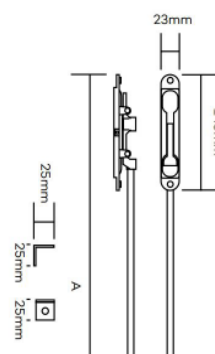

Available with a 300mm or 600mm bolt.

Available in: Satin Chrome, and Matt Black.

Visible Fixed Panic Bolts



Straight



Offset

Available lengths:

- 300mm
- 450mm
- 600mm
- 900mm
- 1000mm

Concealed Fixed Panic Bolts



Straight



Offset

Available lengths:

- 300mm
- 450mm
- 600mm
- 900mm
- 1000mm

For more information




Scan Here!

Specification guide

Briton

Model	Function
Push pad rim latch - exit only B1438E	
Push pad with vertical rods - exit onlyB372E	
Single panic bolt - exit only B376E	
Single panic bolt - exit with dogging B376E/	Dogging D
Single panic bolt - exit with alarm B376E/	Alarm switch A
Single panic bolt - exit with pullman latch B376E/	Pullman latch P
Single panic bolt - exit with pullman latch & dogging . B376E/	Pullman with dogging P/D
Double panic bolt - exit onlyB377E/	
Double panic bolt - exit with doggingB377E/	Dogging D
Consists of B376/B378 & B378DDS Rim strike plate	
Single rim panic latch - exit only B378E	
Single rim panic latch - exit with dogging B378E/	Dogging D
Single panic mortice latchB379	
Single panic mortice latchB379/	Alarm switch A

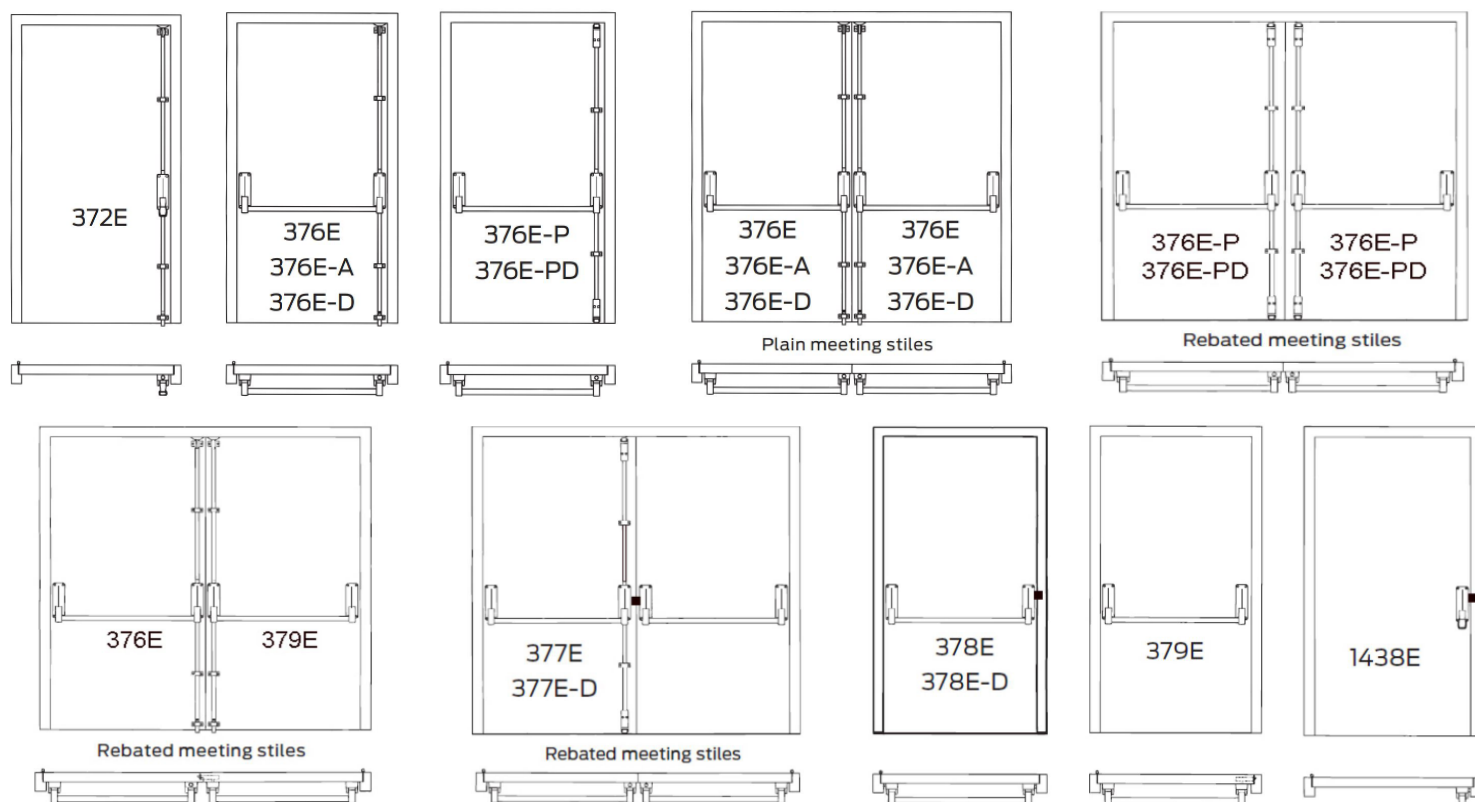

For more information scan here →



DOOR CLOSERS & FLOOR SPRINGS

Ryobi Standard Arm Closer



62 - Solid Core/Aluminium. < 45kg
63 - Solid Core/Aluminium. < 60kg
64 - Metal Clad. < 75kg

162 - Solid Core/Aluminium. < 45kg
163 - Solid Core/Aluminium. < 60kg
* Hold Open closers, fitted on pull side of the closer.

Ryobi Parallel Arm Closer



62P - Solid Core/Aluminium. < 45kg
63P - Solid Core/Aluminium. < 60kg
64P - Metal Clad. < 75kg

162P - Solid Core/Aluminium. < 45kg
163P - Solid Core/Aluminium. < 60kg
* Hold Open closers, fitted on pull side of the closer.

Ryobi 1200BC



The Ryobi 1200BC has an adjustable closing and latch speed, back check, interior door up to 80kg, 1100mm wide.

Ryobi Transom Closer



Ryobi concealed overhead door closers are available in hold open or non hold open models. Available with opening options of 90 & 105 degrees

Lockwood 7726



Hold-open can be set at any angle up to 150° of opening. Adjustable closing and latching speed. Suitable for left or right hand doors.

Lockwood 7714



Hold-open can be set at any angle up to 150° of opening. Regular, parallel and over-door mounting. Suitable for left or right hand doors. Slide Arm option available.

Lockwood 2616



The Lockwood 2616 CAM Action Door Closer is a premium, high quality door closing device. Covers RH, LH, Push and Pull applications.

Lockwood 2024



Multi position mounting template enables adjustment on site. Suitable for doors up to 1100 mm in width. Includes parallel arm bracket.





Surface Mounted Door Closer Catalogue






Surface Mounted Door Closer Catalogue





Transom Closer Catalogue


Schlegel Weather Seal

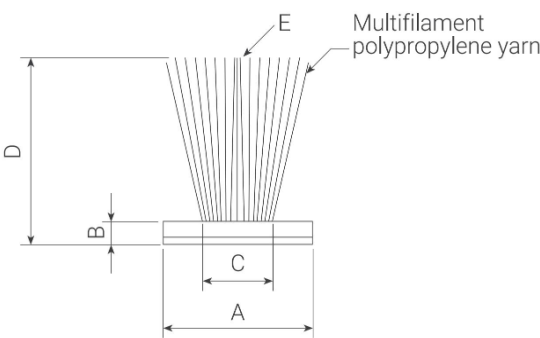

A Backing Width	B Backing Thickness	C Pile Base Width	D Brush Height
4.8mm	0.8mm ± 0.15mm	2.4mm ± 0.3mm	3.0mm - 6.5mm 0.5mm intervals
6.9mm	0.8mm ± 0.15mm	2.4mm ± 0.3mm	3.0mm - 6.5mm 0.5mm intervals


The most commonly used sizes are: 4.8mm base with a 4.75mm brush used for windows (product code 51148475) and 6.9mm base with a 4.75mm brush used for doors (product code 51169475). Both of which we keep in stock.

Schlegel Fringe Pile

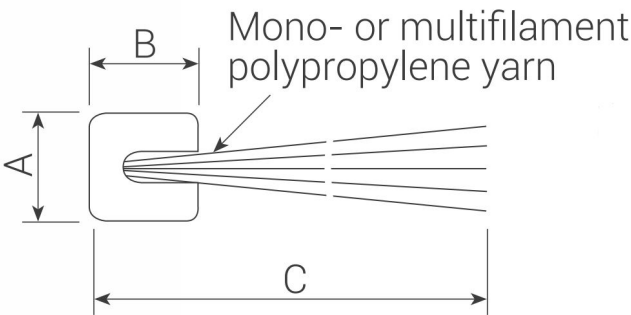

A Base Width	B Base Height	C Brush Height
2.7mm * Most common *	2.7mm, 2.9mm, 3.1mm, 3.3mm	5.0mm - 30.0mm 1.0mm intervals
2.9mm	2.7mm, 2.9mm, 3.1mm, 3.3mm	5.0mm - 30.0mm 1.0mm intervals
3.1mm	2.7mm, 2.9mm, 3.1mm, 3.3mm	5.0mm - 30.0mm 1.0mm intervals
3.3mm	2.7mm, 2.9mm, 3.1mm, 3.3mm	5.0mm - 30.0mm 1.0mm intervals

Kilargo Drop Down Seal - IS8010 (Raven RP8 Equivalent)

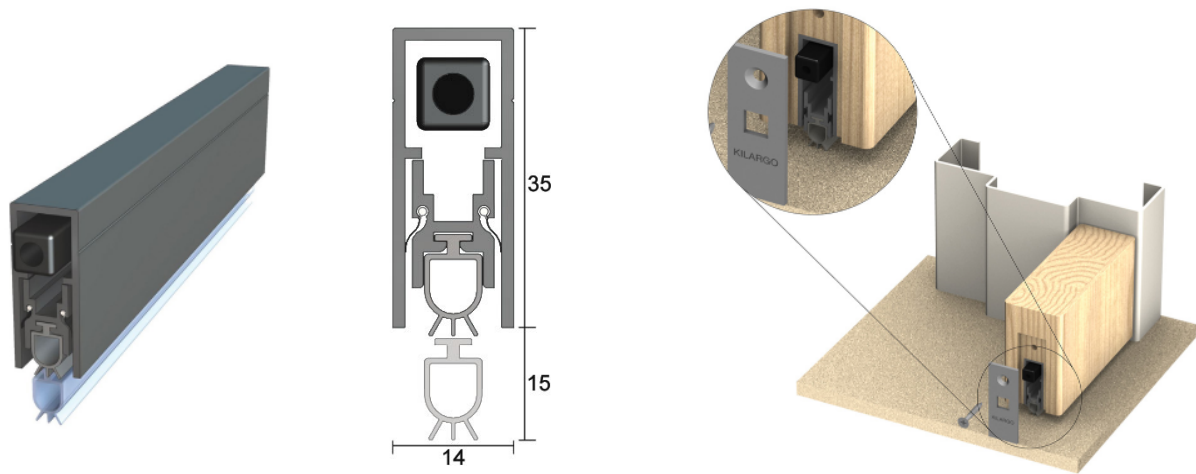

A medium duty, concealed automatic door bottom seal which is mortised into the bottom edge of single action doors. It operates automatically by a spring loaded mechanism which lifts the seal clear of the floor as soon as the door is opened.


Standard Lengths:	Maximum allowable cut-back sizes:
380mm	Cuts back to 275mm
600mm	Cuts back to 380mm
820mm	Cuts back to 600mm
920mm	Cuts back to 820mm
1070mm	Cuts back to 920mm
1200mm	Cuts back to 1070mm




WINDOW LOCKS, CATCHES & STAYS




Keyed Sash Lock

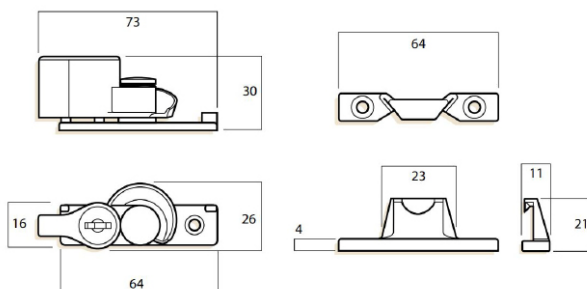

Keyed Sliding Window Lock

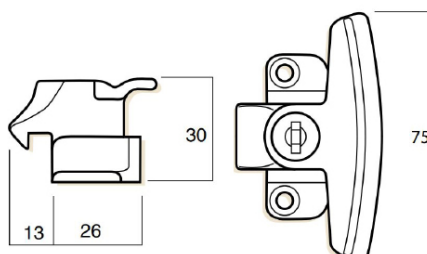

Series 25 Window Lock

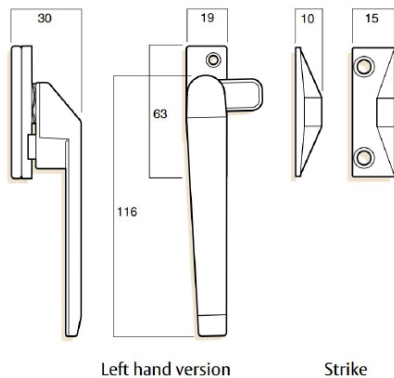

Interlock Window Stays




Model	Max. Sash Height	Opening Angle	Max. Sash Weight
200 NF	600mm	40°	10Kg
350 NF	800mm	30°	20Kg
500 NF	1800mm	25°	30Kg

For more information scan here →



Patio Bolt

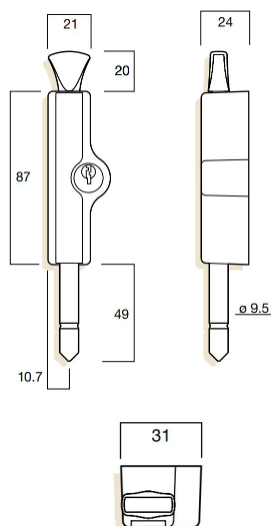

Carbine Sliding Window Lock





Designed to suit most aluminium sliding windows. Suitable for left & right hand fitting, front mount and side mount.

*Black is our only stocked colour. All other colours will need to be ordered in.

WINDOW CHAINWINDERS

Whitco Lockable Chainwinder (fold away handle)

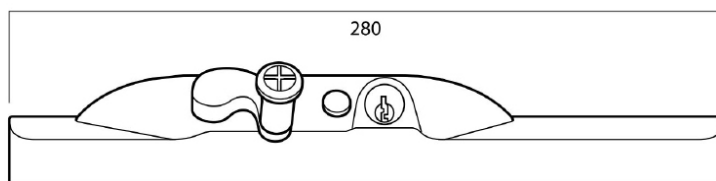

Available Colours:



Black



White



Primrose



Stone Biege




Silver




Brown


Lockwood Elevation Chainwinder

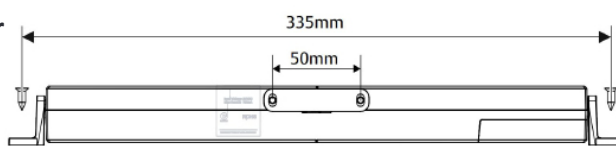


Pivot Mount

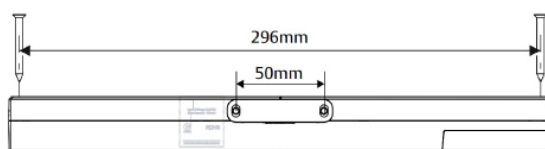

Fixed Mount

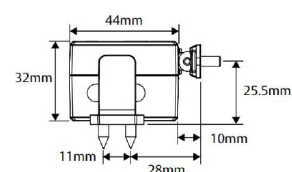


Pivot Mount Top Chain Exit




Pivot Mount Bottom Chain Exit

*Optional Bracket


Elevation Touch Pad



Elevation Network Adaptor



Elevation Rain Sensor



Elevation Sync Wiring Loom



The Elevation Sync Wiring Loom synchronises 2 Elevation chainwinders to work simultaneously in their open and closing functions.



Whitco Chainwinder
Catalogue



Lockwood Elevation
Catalogue



SPIRAL SASH BALANCES




Option 1 - TOP SASH BALANCES

1. Measure the overall height of the top sash (including horns, if used). This is the Closed 'C' Dimension.
2. Refer to appropriate Closed 'C' dimensions on size chart and select the Balance Number matching the Closed 'C' Dimension.
3. If there is not an exact match to Closed 'C' Dimension go to the next smaller Balance Number
e.g. – For Closed 'C' dimension of 341mm select balance number 110.


Option 2 - BOTTOM SASH BALANCES

1. Measure the overall window opening height from sill to head. This is the Extended Dimension 'E'
2. Refer to appropriate Extended Dimensions 'E' on size chart and select the Balance Number matching the Extended 'E' Dimension.
3. If there is not an exact match to Extended 'E' Dimension go to the next larger Balance Number size.
e.g. – For Extended 'E' dimension of 546mm select balance number 110.

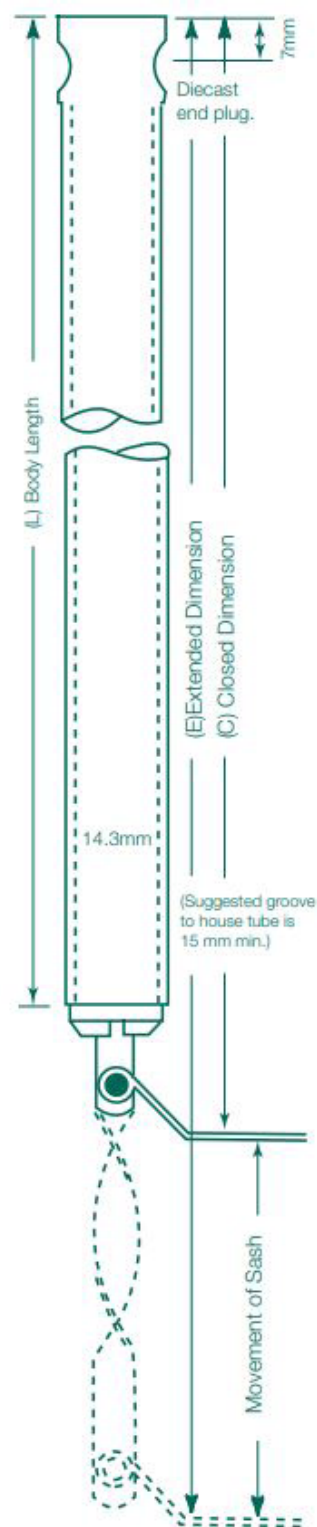


Spiral Balance Accessories

Tentioning Key

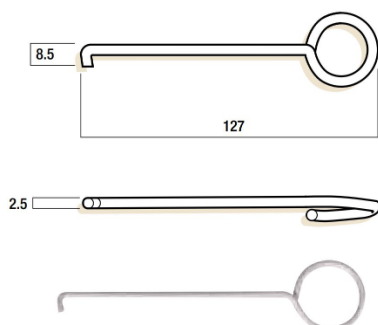

Adjustable Foot

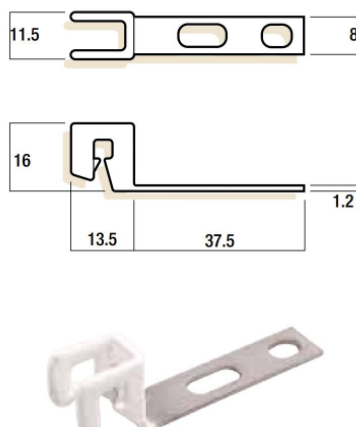

Sash Balance Sizing Chart

Balance Number	'C' Closed Dimension (For top balance use exact balance or go smaller)	'E' Extended Dimension (For bottom balance use exact balance or go larger)	'L' Body Length	Weight Range 1 2.25-7.25 Kg	Weight Range 2 7.25-10 Kg	Weight Range 3 10-14 Kg
110	318	559	292	3		
200	343	610	318	3		
220	368	660	343	3		
240	394	711	368	3		
260	419	762	394	3		
280	445	813	419	3		
210	470	864	445	3		
300	495	914	470	3		
320	521	965	495	4		
340	546	1,016	521	4		
360	572	1,067	546	4		
380	597	1,118	572	4		
310	622	1,168	597	4		
400	648	1,219	622	4	5	6
420	673	1,270	648	4	5	6
440	699	1,321	673	4	5	6
460	724	1,372	699	5	5	6
480	749	1,422	724	5	5	6
410	775	1,473	749	5	5	6
500	800	1,524	775	5	5	6
520	826	1,575	800		5	6
540	851	1,626	826		6	6
560	876	1,676	851		6	7
580	902	1,727	876		6	7
510	927	1,778	902		6	7
600	953	1,829	927		6	7
620	978	1,880	953		6	7
640	1,003	1,930	978		7	7
660	1,029	1,981	1,003		7	8
680	1,054	2,031	1,029		7	8
610	1,080	2,083	1,054		7	8
700	1,105	2,134	1,080		7	8
720	1,130	2,183	1,105		7	8
				Initial number of pre-tension turns to use during installation		


5

Pre-tension turns number


Numbers shown in the main table are the initial number of pre-tension turns to use during installation for that balance

Altair® Louvres


- Clips are manufactured from UV stabilised polypropylene. The clip colour is solid throughout. Primary and secondary drainage channels within the louvre clips direct the flow of any water to the outside of the building.
- Altair keylocks are zinc cast with a brushed chrome finish. The folding key design allows easy operation when installed in frames with deep jambs or reveals.
- The handle is made entirely from a UV stabilised acetal. This makes it not only non corrosive, but ideal for commercial areas, as it will spring back to position, even when bent severely. For other handle options see the Altair Handles section.
- For long and maintenance free use the operating and over centre locking mechanisms are manufactured from non-corrosive material, including all rivets and fasteners.
- Extruded "T" shaped aluminium operating bars provide a strong, non corrosive, durable and smooth operating mechanism. It also adds extra security as the bars operate to the outside of the channel at all times.
- Injection moulded bearings made of acetal use the living hinge concept to pull the louvre blade against the channel as the window is closed. This results in higher resistance to water and air. Security is now increased by interlocking teeth in the bearing retainer. (Tested to over 40,000 open/close cycles)
- The Altair Louvre channel is made from 6060-T5 extruded aluminium.
- Worldwide patents approved.

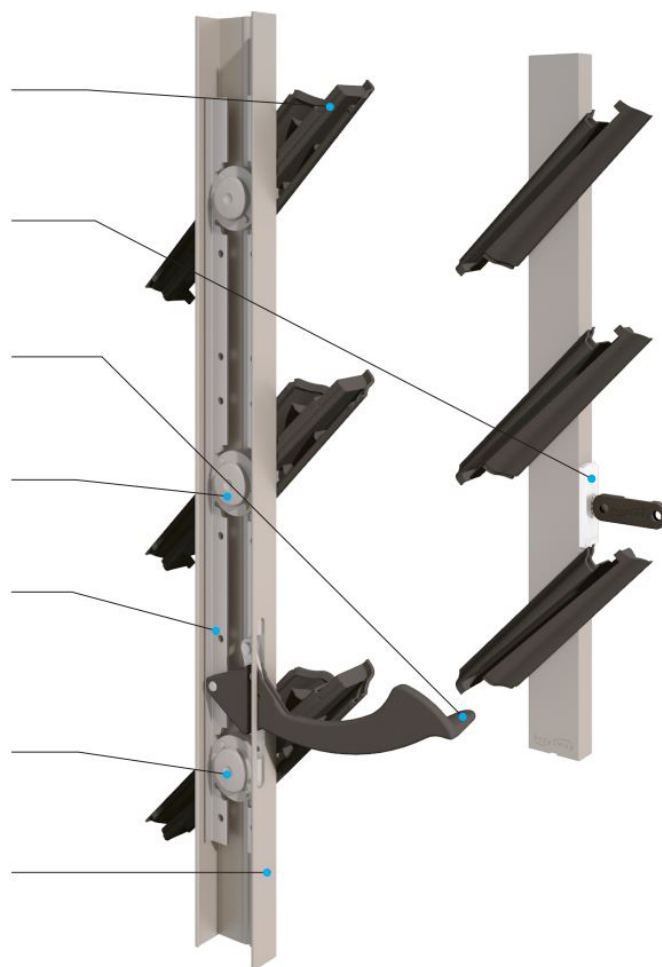

152mm Glass Blade

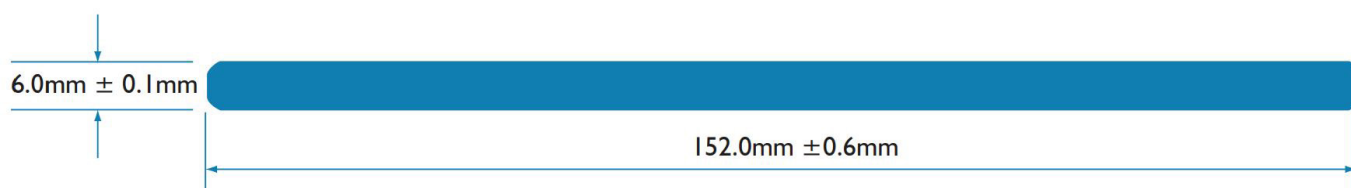

102mm Glass Blade

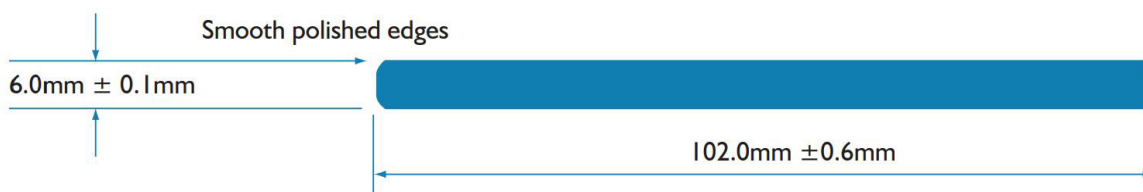

*** Daylight opening size required when placing an order ***

Standard Heights - Altair® Component System


Heights for 102mm Blade Louvre Gallery		
No. of Blades	Height (mm) No Weatherstrip	Height (mm) With Weatherstrip
3	310	320
4	400	410
5	490	500
6	580	590
7	670	680
8	760	770
9	850	860
10	940	950
11	1030	1040
12	1120	1130
13	1210	1220
14	1300	1310
15	1390	1400
16	1480	1490
17	1570	1580
18	1660	1670
19	1750	1760
20	1840	1850
21	1930	1940
22	2020	2030
23	2110	2120
24	2200	2210
25	2290	2300
26	2380	2390
27	2470	2480
28	2560	2570
29	2650	2660
30	2740	2750
31	2830	2840
32	2920	2930
33	3010	3020

Heights for 152mm Blade Louvre Gallery		
No. of Blades	Height (mm) No Weatherstrip	Height (mm) With Weatherstrip
2	320	330
3	460	470
4	600	610
5	740	750
6	880	890
7	1020	1030
8	1160	1170
9	1300	1310
10	1440	1450
11	1580	1590
12	1720	1730
13	1860	1870
14	2000	2010
15	2140	2150
16	2280	2290
17	2420	2430
18	2560	2570
19	2700	2710
20	2840	2850
21	2980	2990



Map Rod used in conjunction with the Ring Pull Handle when installed out of arm's reach.

2m, 3m and 4m set lengths
1.8m – 3.6m telescopic length

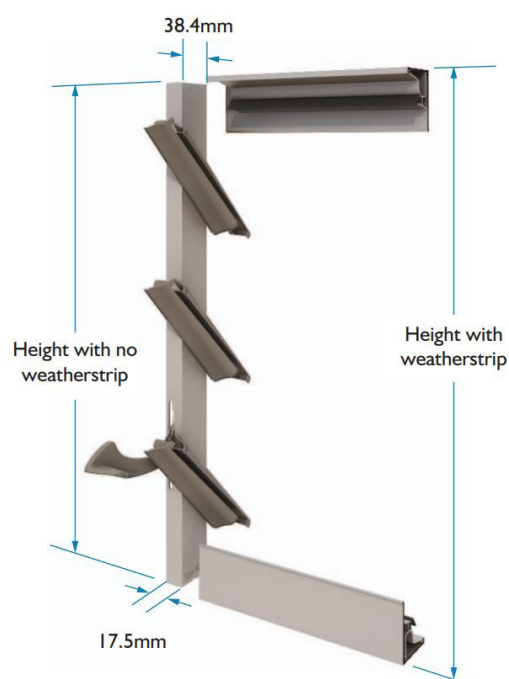


Formulas for Other Handle Positions

1. Low Profile Handle Position = Standard Handle Position – 8mm
2. Ring Handle Position = Standard Handle Position +19mm*

* For 3 and 4 blade galleries:



Ring Handle position = Standard Handle Position –71mm

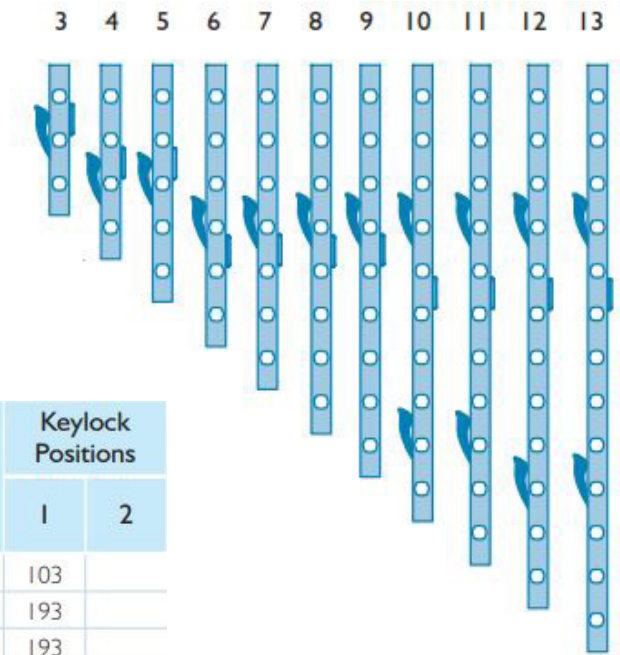


No. of Blades	Banks of Blades Controlled from Head Downwards		Channel Length	Dim A	Dim B	Dim C	Dim D	Keylock Positions	
								1	2
3	3		310	90				103	
4	4		400	180				193	
5	5		490	180				193	
6	6		580	270				373	
7	7		670	270				373	
8	8		760	270				373	
9	9		850	270				373	
10	6	4	940	270	720			463	
11	6	5	1030	270	720			463	
12	6	6	1120	270	810			463	
13	6	7	1210	270	810			463	
14	7	7	1300	270	900			643	
15	7	8	1390	270	900			643	
16	9	7	1480	630	1080			823	
17	9	8	1570	630	1080			823	
18	9	9	1660	630	1080			823	
19	9	5	5	1750	630	990	1440	823	1273
20	9	5	6	1840	630	990	1530	823	1273
21	9	5	7	1930	630	990	1530	823	1273
22	9	6	7	2020	630	1080	1620	823	1453
23	9	6	8	2110	630	1080	1620	823	1453
24	9	6	9	2200	630	1080	1620	823	1453
25	9	9	7	2290	630	1080	1890	823	1633
26	9	9	8	2380	630	1080	1890	823	1633
27	9	9	9	2470	630	1080	1890	823	1633
28	9	6	4	9	2560	630	1080	1530	1980
29	9	6	5	9	2650	630	1080	1530	2070
30	9	7	5	9	2740	630	1080	1620	2160
31	9	7	6	9	2830	630	1080	1710	2250
32	9	7	7	9	2920	630	1080	1710	2340
33	9	7	8	9	3010	630	1080	1710	2430

Note:


- Additional handles can be specified or relocated to another position. Each handle can operate a maximum of nine clips including at least one clip directly below the handle.
- Relocated keylocks are not available.

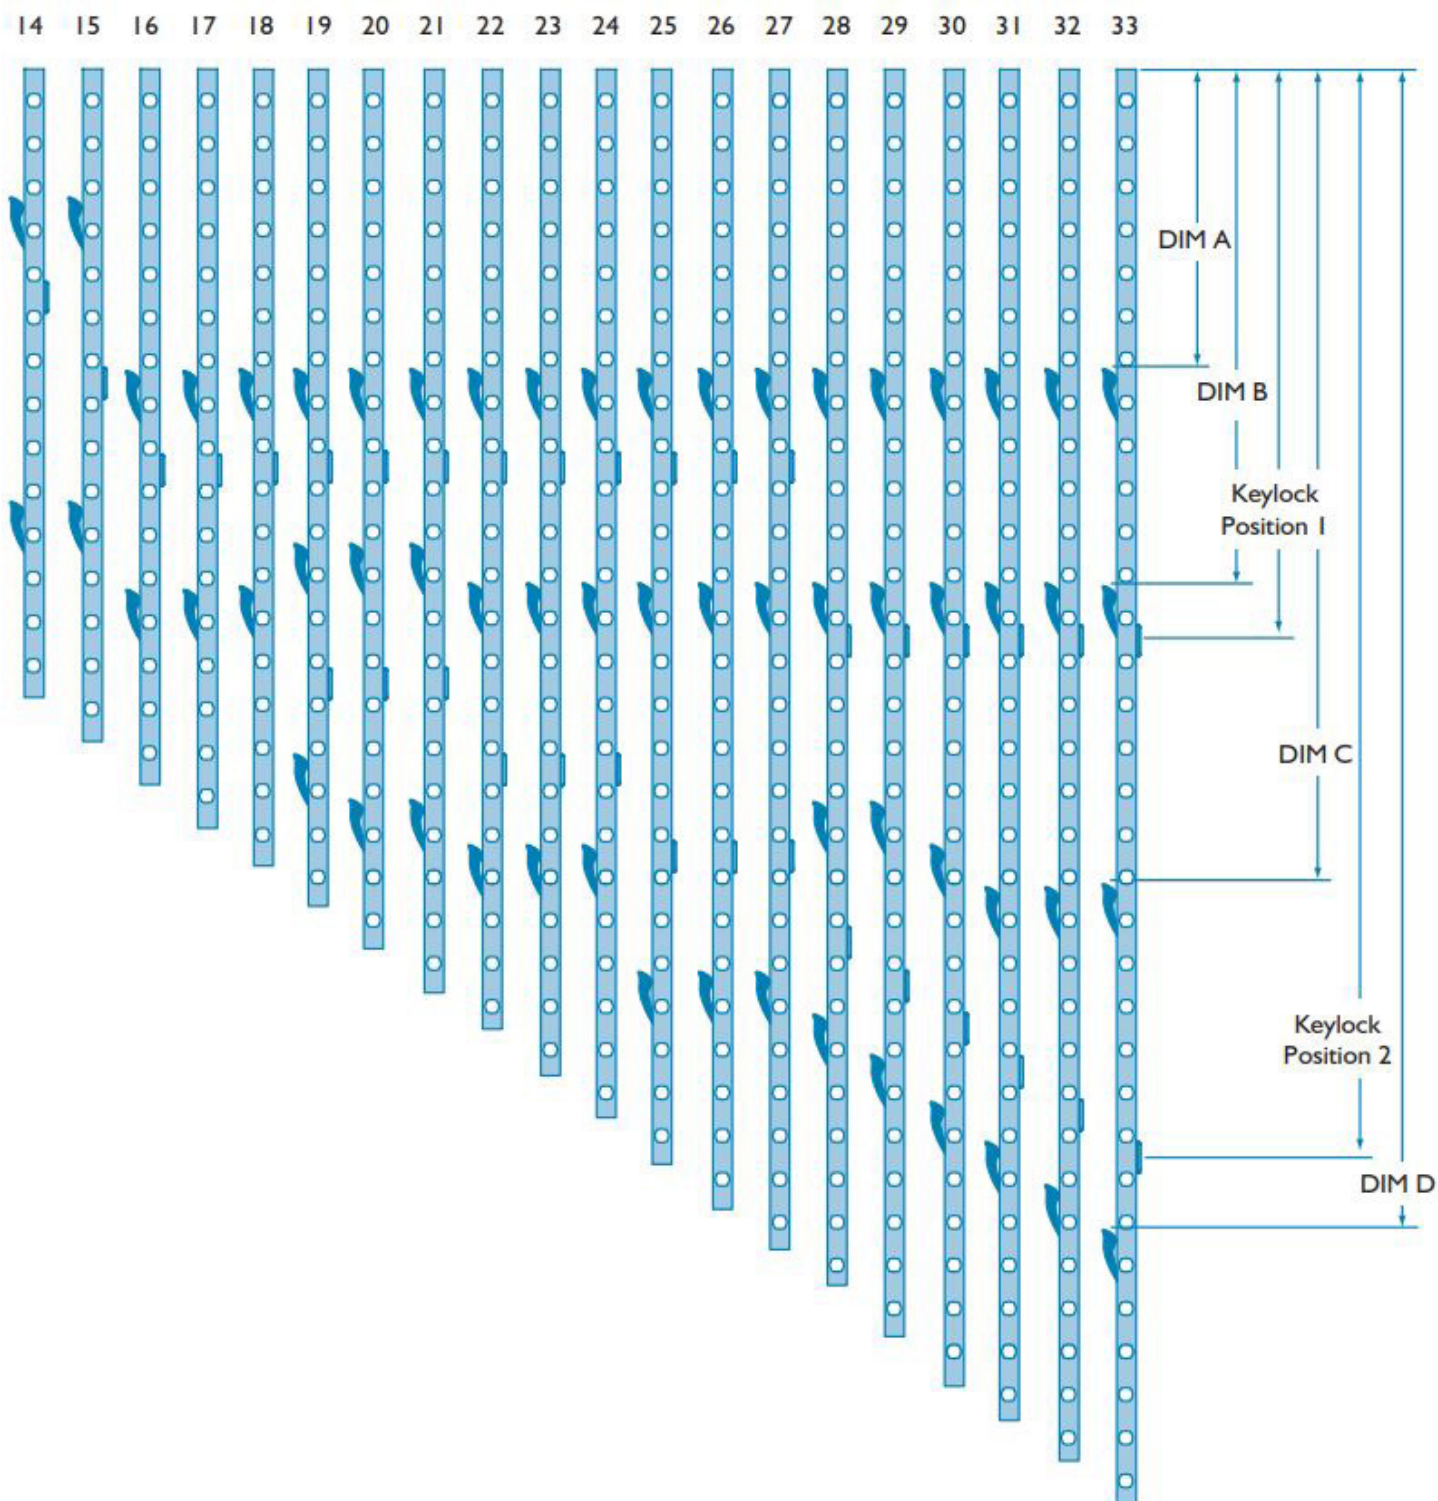

Standard Handle



Low Profile Handle



Ring Handle (P13)

Formulas for Other Handle Positions

1. Low Profile Handle Position = Standard Handle Position – 3mm
2. Ring Handle Position = Standard Handle Position +22mm

No. of Blades	Banks of Blades Controlled from Head Downwards	Channel Length	Dim A	Dim B	Dim C	Keylock Positions
2	2	320	72			128
3	3	460	212			268
4	4	600	212			268
5	5	740	212			268
6	6	880	492			548
7	7	1020	632			688
8	8	1160	632			688
9	9	1300	632			688
10	7 3	1440	632	1192		968
11	7 4	1580	632	1192		968
12	7 5	1720	632	1192		968
13	8 5	1860	632	1332		968
14	9 5	2000	632	1472		1108
15	7 8	2140	632	1612		1108
16	7 9	2280	632	1612		1108
17	8 9	2420	632	1752		1108
18	9 9	2560	1052	1892		1528
19	9 4 6	2700	1052	1472	2312	1528
20	9 6 5	2840	1052	1752	2312	1808
21	9 7 5	2980	1052	1892	2452	1948

Note:

- Additional handles can be specified or relocated to another position. Each handle can operate a maximum of nine clips including at least one clip directly below the handle.
- Relocated keylocks are not available.

For a better view of the handles scan these QR codes:





Standard Handle




Low Profile
Handle




Ring Handle

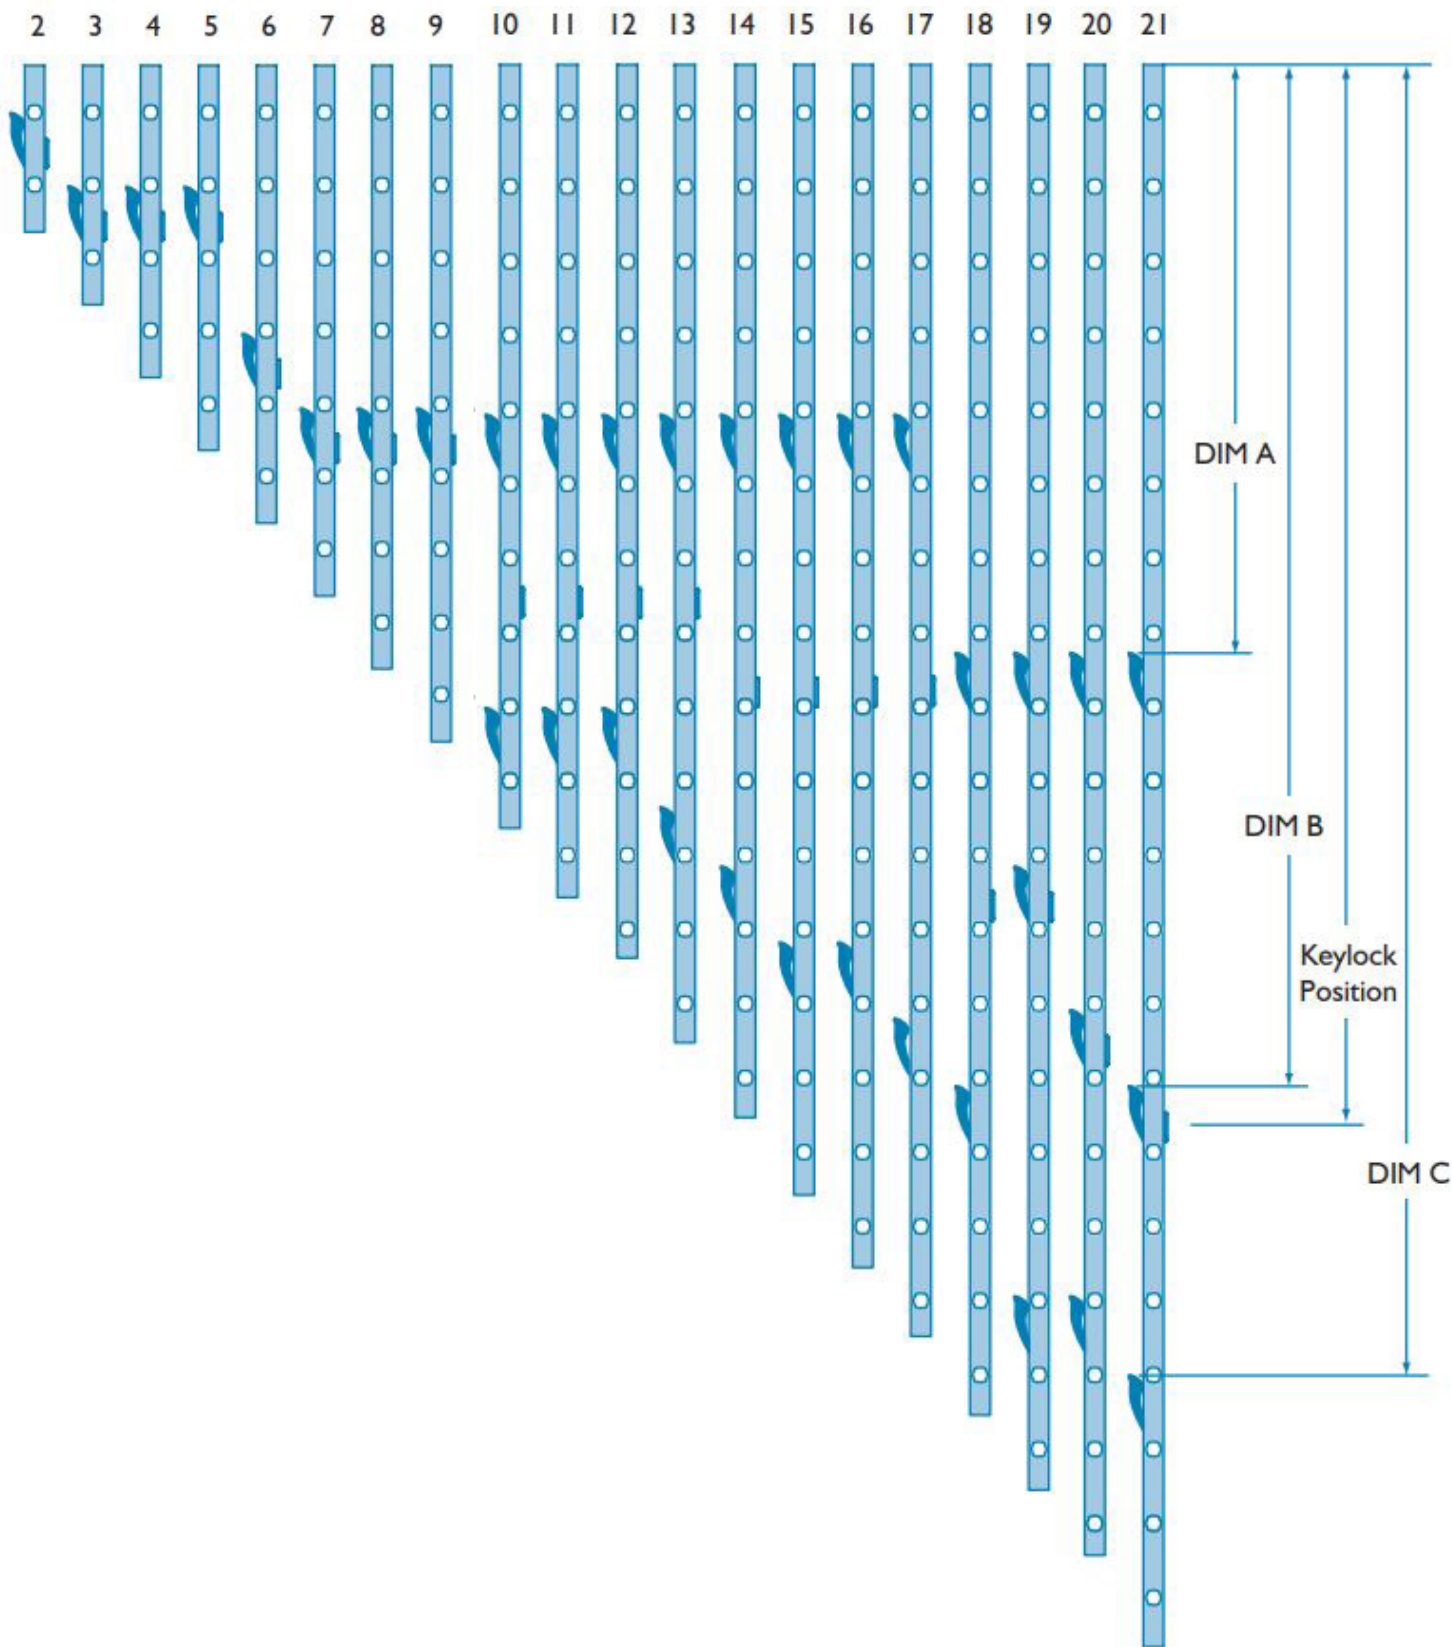

Standard Handle




Low Profile Handle



Ring Handle (P13)

Altair® Louvre Keylock

The Altair Keylock has been designed to be inconspicuous, strong and durable.

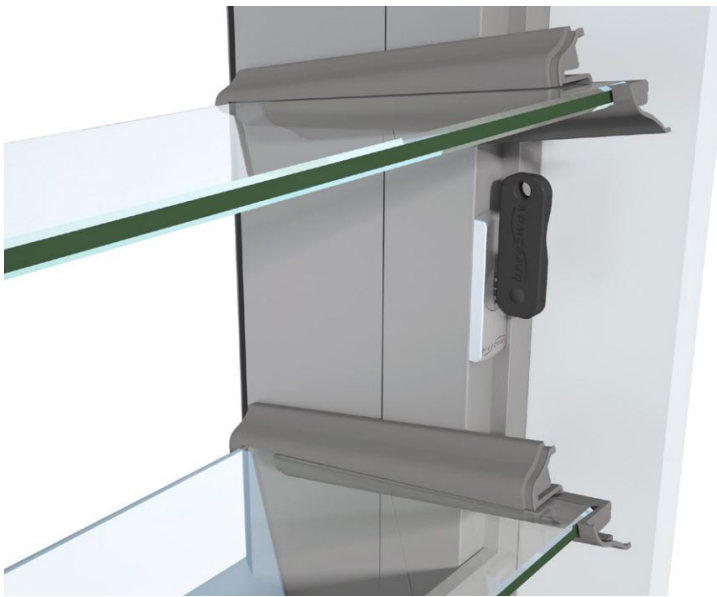

Improved aesthetics

- Housing the lock mechanisms internally results in a low profile design. The brushed chrome finish suits all aluminium finishes.

Strong and durable


- All metal construction and housing the mechanisms internally results in a strong, highly durable lock.



Easy operation with deep jambs or reveals

- The folding key design allows easy locking and unlocking even when situated right beside deep jambs or reveals.

Maintenance free

- No ongoing maintenance require besides normal cleaning. Tested and passed 15,000 lock & unlock cycles.

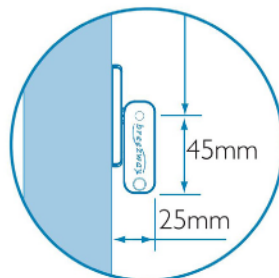

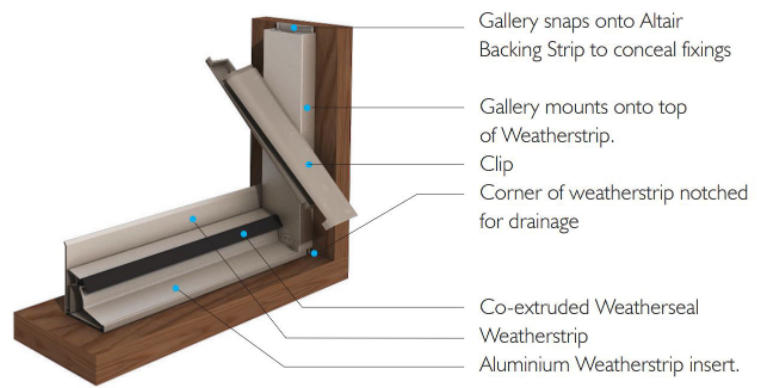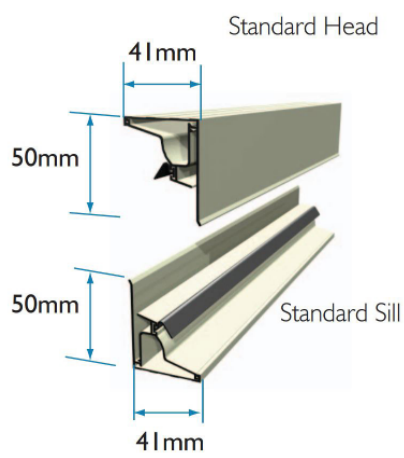

GENERAL CONSUMABLES

Maccsim Window Packers



Available Thicknesses:

- 1.0mm
- 1.5mm
- 3.2mm
- 5mm
- 6.4mm
- 10mm



Can be purchased as a mixed bucket or as a bucket per size.

Maccsim Cable Ties



Multi-purpose Cable Ties available in widths of: 3.0mm, 3.6mm, 4.8mm & 7.2mm.

lengths ranging from: 100mm to 370mm.

100pk Blade Dispenser



Sterling blades are made from High Carbon alloy steel precision ground and sharpened to a razor edge that provides maximum sharpness and durability.

Made in Sheffield - England.

18mm Snap Off Blades



Most popular and widely used snap-off blade. Suits all Large 18mm Snap Cutters. 3-Stage grinding process produces a sharper blade that lasts longer.

Made in Sheffield - England.

100pk Single Edge Blades



Sterling heavy duty #12 gauge single edge blade.

Made in U.S.A.

Replacement Blade for Universal Shears



Replacement Blade for 1105 Universal Shears.



Hacksaw Replacement Blades



- Bi-Metal flexible blade 12" / 300mm
- Virtually unbreakable
- Industrial quality
- Suits hacksaw frames HF-40T and HF-506

Replacement Anvil for Universal Shears



Replacement Anvil for 1105 Universal Shears.



Bag of Rags (Flannelette)



Handy rags for general purpose use around your workplace. Clean, dust and polish with these flannelette rags.

Bostik Handy Wipes



Waterless cleaning towels. Effectively removes adhesives, sealants, tar, wax, grease, oil and other hard to remove substances from tools and equipment.

Paper Towel



General purpose Paper Towel. 180mm x 80M. Comes in carton lots of 16.

Glazing Putty



A traditional linseed oil based glazing putty suitable for wooden surfaces. It is ideal for glazing timber window frames and filling nail holes and small cracks.

Tub Sizes:

400g, 1kg, 4.5kg & 10kg

*Steel Putty also available

Macsim Wall Plugs



Light duty traditional expansion anchor for use in solid base materials such as concrete, stone solid brick & solid block.

5mm, 6mm, 7mm & 8mm plugs available.

Fischer DUOPOWER Wall Plug



The DUOPOWER plug is suitable for prepositioned and push-through installation. The duo of two different materials and its multi-functional abilities (expanding, folding, and knotting) extend the range of applications to additional materials with top loads.

Dampcourse



Available in 110mm, 230mm & 380mm widths. 30M in length, Carton lots of 4.

Dampcourse is a thick, black polyethylene strip with an embossed surface that reduces slippage in use. Dampcourse provides an effective moisture barrier for use as a concealed window flashing.

SILICONES, SEALANTS & ADHESIVES




Product Details:

One component, high modulus, rapid curing acetic cure silicone sealant. It meets engineering standards for glazing and can be used for frameless showerscreens.

Special Features:

Superior adhesion to glass.

Colours in stock:



Translucent

Black




Product Details:

One component, non-flowing, neutral cure, high modulus flex. It cures by absorption of atmospheric moisture to form a flexible and durable sealant.

Special Features:

Superior adhesion to painted anodized aluminium and glass.

Colours in stock:

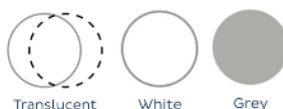

Translucent

White

Grey



Silver



Black



Product Details:

One component, non-flowing, neutral cure, mid modulus silicone sealant. It cures to form a flexible and durable elastomeric sealant.

Special Features:

Excellent in sanitary and tiling applications.

Colours in stock:



Translucent



Product Details:

Exhibits exceptional adhesion capabilities and is suitable for a wide range of industrial and automotive adhesion applications for internal and external uses.

Special Features:

Exceptional noise, vibration and impact dampening characteristics.

Colours in stock:



White

Grey



Product Details:

General purpose, water based, acrylic gap filler. Suitable for interior and exterior areas prior to painting. Excellent adhesion properties suitable for sealing gaps and low movement joints.

Special Features:

Can be painted over.

Colours in stock:



White



Product Details:

Zbond® 616 is a one component, non-flowing, neutral cure, mid modulus silicone sealant for use in glazing weatherseals.

Special Features:

Resistance to UV, weathering, ozone, vibration, moisture and temperatures.

Colours in stock:



Translucent

Black



Product Details:

When cured it will form a tough, flexible seal capable of cyclic expansion and contraction movement of 100% (\pm 50%) of the original joint width.

Special Features:

Excellent durability - unaffected by normal weathering conditions.

Colours in stock:



White

Grey

Epping Grey

Black



Product Details:

Aluseal is a fast setting elastomer which provides a tough flexible seal to butt and mitre joints, screw heads and other seams in metal window frames, screens, etc.

Special Features:

Effective at eliminating corrosion of joints due to oxidization at clean and fresh cut edges.

Colours in stock:



Translucent

*Available in 500ml, 4L and 20L tubs


*Available in Cartridges and Foil Sausages

680 Sanitary

Product Details:

A high performance neutral cure silicone sealant designed to resist the growth of mold and mildew where conditions of high humidity and temperature exist. It is ideal for use in and around bathrooms, laundry sinks, ceramic tiles, vitreous china, enamel painted surfaces and fiberglass spa units.

Colours in stock:



Translucent White

Dow Corning 688

Product Details:

One-part neutral cure silicone sealant designed for a wide range of glazing, weathersealing and professional caulking applications. It will bond to form a strong weatherproof seal on most common building materials.

***Available in Cartridges and Foil Sausages**

Colours in stock:



Translucent Black

Dow Corning 995

Product Details:

A one-component, self-priming, shelf-stable, neutral-cure, elastomeric adhesive specifically formulated for silicone structural glazing and exhibits excellent unprimed adhesion to most building substrates. This product has superior unprimed adhesion for structural glazing applications for hurricane or impact rated windows and doors. It has a movement capability of +/- 50%.

***Available in Cartridges and Foil Sausages**

SOUDAL



Product Details:

T-Rex Power Fast Grab is a high quality, neutral, elastic, 1-component adhesive sealant based on SMX® Polymer with a very high initial tack. T-Rex Power Fast Grab is a high strength sealant / adhesive that can hold 320kg's per 10cm2 with a 1 Second immediate grab.

Colours in stock:



Translucent Bright White Steel Grey Jet Black



Product Details:

T-Rex Crystal is a high quality, crystal clear, neutral, elastic, single component sealant/adhesive based on SMX®-Polymer. All interior and exterior bonding and sealing applications. Transparent and elastic bonding in many different construction and building applications. Interior bonding of glass and other transparent materials (cannot be used as a glazing sealant).

MACSIM®



Product Details:

MF60 Glazing Sealant is a premium extra high strength medium modulus one part moisture curing, 100% calcium carbonate filled, high performance neutral cure silicone sealant (oxime) designed to give superior adhesion and durability in a wide range of glazing, weather sealing and trade applications.

Colours in stock:



TRANSLUCENT BLACK



Product Details:

Sanitary sealant is a single component, neutral silicone sealant with excellent anti-fungal properties. It resists mildew and is suitable for many common areas which may be exposed to high humidity and temperature conditions. It will bond to form a durable, flexible, waterproof seal on most building materials.

****Only Available in Clear****




Product Details:

MF10 Gap Filler is a one part, gun applied, water-based acrylic sealant that cures to a flexible and tough rubber with good adhesion to porous surfaces without primer. It is an environmentally friendly sealant that can be easily cleaned up with water. It can be used on joints where movement is no more than 20%. For use on walls; ceilings, doors, window frames, plasterboard, masonry, aluminium, ceramics.


****Only Available in White****

WEDGE, CHANNEL & SETTING BLOCK


P40 Wedge




P41 Wedge




Special Wedge




8mm Wedge




P115 Wedge




P117 Wedge

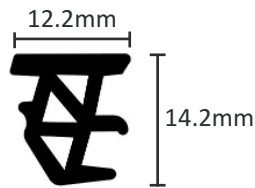


4mm Channel

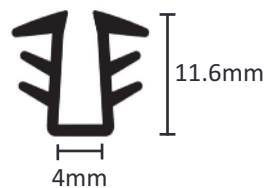

6.38mm Channel

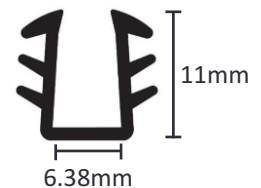

Wardrobe Infill

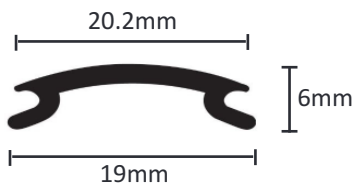


3mm Setting Block



5mm Setting Block



10mm Setting Block




GLAZING, PROTECTION AND MASKING TAPES

Single Sided Glazing Tape



Available in:
1.6mm, 3.2mm or
6.4mm thick and
6mm, 9mm or 12mm
wide.

Double Sided Glazing Tape

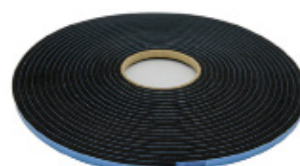

Available in:
1.6mm, 3.2mm or
6.4mm thick and
6mm, 9mm or 12mm
wide.

* Single Sided, Double Sided and Structural Glazing Tape can be cut at any width on request, 5-10 business day turn around and a M.O.Q. of 1 ctn applies *

Mirror Mounting Tape



Available in:
1.6mm & 3.2mm
thickness with a width of
25mm.

VHB (Very High Bond) Tape



VHB Tape is 1mm thick
and comes in widths of
6mm, 9mm and 12mm.
Available in clear or
black.

Masking Tape



24mm, 36mm & 48mm

Protection Tape



24mm, 36mm, 48mm & 75mm

Gaffa Tape



Reinforced Foil Tape



Board Up Film



Protection Film



Woven Mirror Backing




Pallet Wrap



COMMERCIAL DOOR HINGES

Lockwood AH130

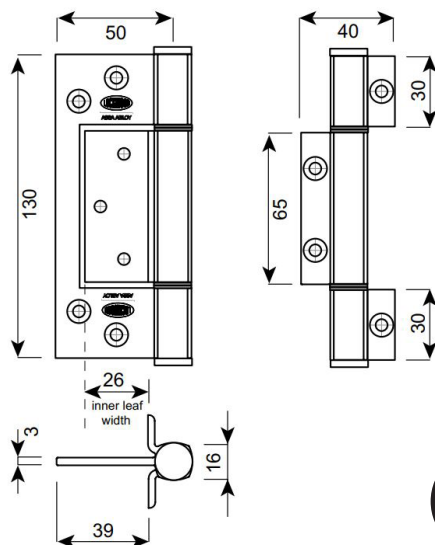

The Lockwood AH130 is a heavy duty fast fix hinge with face fix flanges to suit aluminium commercial door applications. Heavy duty, bi-directional face fix locator flanges allows for faster installation.

- Minimum door thickness 40mm
- Up to 2100 high x 900 x 100kg– 3 hinges
- Up to 2400 high x 900 x 100kg– 4 hinges

Available Colours:



Black



White





Silver




Clear Anodized

McCallum 801 (264S)

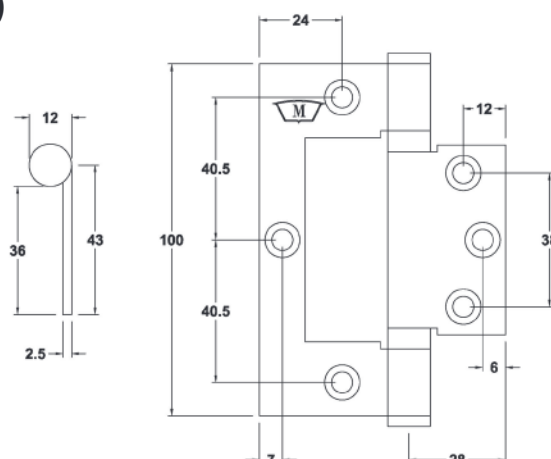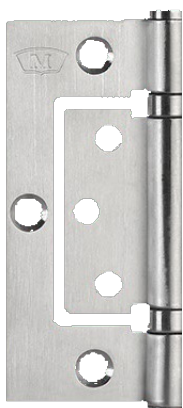

- Medium Duty Ball Bearing Interfold Hinge 100mm.
- Offset Round Knuckle.
- Suitable for Commercial Aluminium & some Timber doors in Aluminium frames.
- Suitable for either Centre Pocket or Front Edged Glazing systems.
- Recommended that the minimum of 3 hinges be used with the top hinge located as high as possible.

Fibreglass

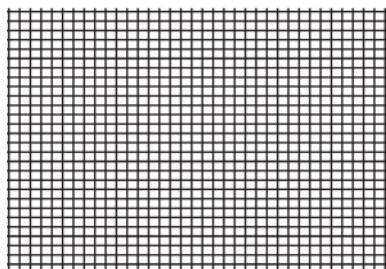


Corrosion Resistance:	★★★★★
UV Resistance:	★★★★
Strength:	★

Ideal For: Screening windows and doors in all areas.

Features:

- Economic choice
- Flexible and pliable
- Great visibility through screen
- UV stabilised for a longer lifespan

Visibility Plus

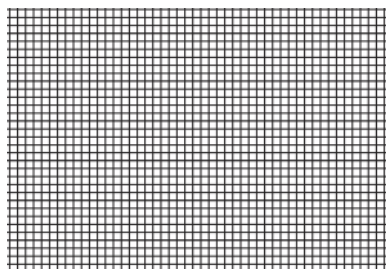


Corrosion Resistance:	★★★★★
UV Resistance:	★★★★
Strength:	★

Ideal For: Screening windows and doors where additional visibility and airflow are required.

Features:

- Finer yarn for excellent visibility and airflow
- Charcoal colour to reduce glare
- Flexible and pliable
- UV stabilised for increased longevity

Miniweave (Midgy)

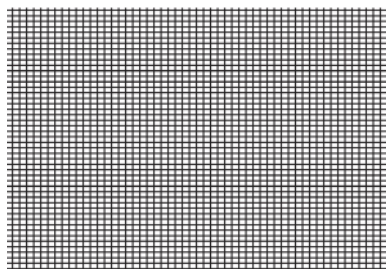


Corrosion Resistance:	★★★★★
UV Resistance:	★★★★★
Strength:	★

Ideal For: Screening windows and doors from very small insects.

Features:

- Super fine mesh size to keep out tiny insects
- Minimises sun glare
- Flexible and pliable
- UV stabilised for increased longevity

Duraview

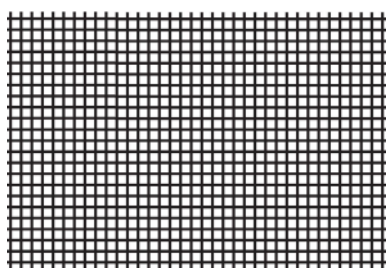


Corrosion Resistance:	★★★★★
UV Resistance:	★★★★
Strength:	★★★★★

Ideal For: Screening windows and doors where extra strength and durability are required.

Features:

- Strong and durable high-density polyethylene
- Good resistance to damage
- Corrosion resistant to suit coastal conditions
- Impressive visibility

Pet Mesh

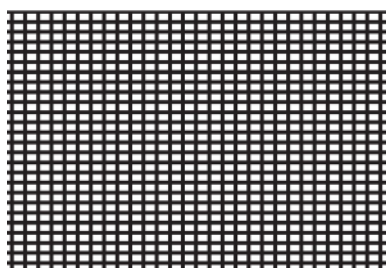


Corrosion Resistance:	★★★★★
UV Resistance:	★★★★
Strength:	★★★★★

Ideal For: Screening windows and doors where pets' claws are a problem.

Features:

- Heavy gauge polyester material
- Resists damage from pets and children
- Flexible and pliable
- UV Stabilised for longer life

Enclosure Plus

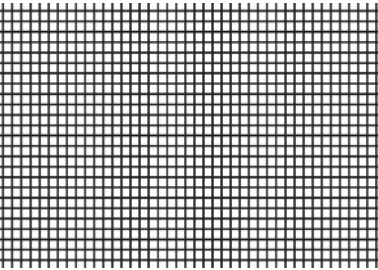


Corrosion Resistance:	★★★★★
UV Resistance:	★★★★★
Strength:	★★★★★

Ideal For: Screening patios, entertainment areas, pool enclosures and general outdoor areas.

Features:

- Resists punctures and tears
- UV resistant for longevity and colour retention
- Include a biocide compound that resists mildew growth
- Impressive visibility and airflow

Bronze

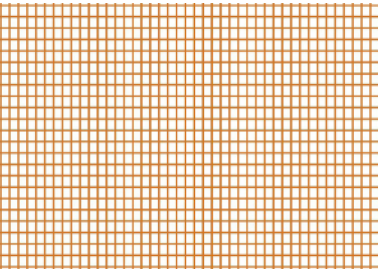


Corrosion Resistance:	★★★★
UV Resistance:	★★★★
Strength:	★★★★

Ideal For: Screening windows, doors and vents in period style homes.

Features:

- Quality bronze material
- Rejuvenates screens in period style homes
- Ideal for timber windows and doors
- Suitable for tough conditions

Aluminium

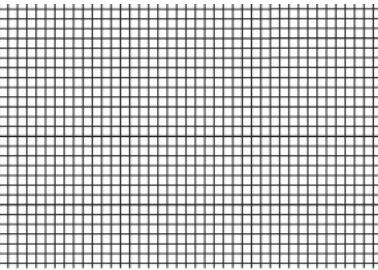


Corrosion Resistance:	★★★
UV Resistance:	★★★★
Strength:	★★★

Ideal For: Screening windows and doors where extra strength is required.
BAL Rating: Up to BAL 29

Features:

- Extra strength aluminium material
- Powdercoated charcoal
- Minimises glare
- Excelent airflow and visibility through screen

Tuff-lite

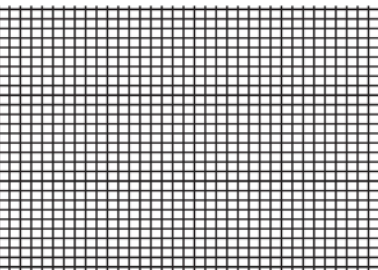


Corrosion Resistance:	★★★★
UV Resistance:	★★★★
Strength:	★★★

Ideal For: Screening windows and doors in tough and demanding conditions.
BAL Rating: Up to BAL 29

Features:

- Thicker aluminium material
- Provides additional strengtn
- Withstand damage from pets and children
- Resists extreme weather conditions

Tuff-screen

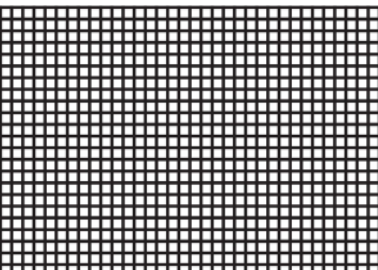


Corrosion Resistance:	★★★★
UV Resistance:	★★★★
Strength:	★★★★★

Ideal For: Screening windows and doors where superior toughness is required.
BAL Rating: Up to BAL 29

Features:

- Super thick aluminium
- Extra tough and durable
- Resistant to damage caused by pets
- Minimises glare but maintains visibility

Stainless Steel

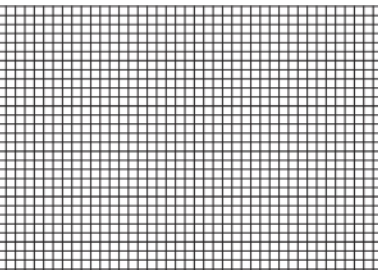

Corrosion Resistance:	★★★★★
UV Resistance:	★★★★★
Strength:	★★★★★

Ideal For: Screening windows and doors in bushfire-prone or coastal areas.
BAL Rating: Up to BAL FZ

Features:

- 316 marine grade stainless steel for increased durability
- Corrosion resistant
- Super strong stainless steel wire
- Fine wire for impressive visibility and airflow

DAPA SPLINE

Foam Dapa Spline



Available in 4.0mm, 5.3mm, 5.7mm & 6.0mm diameters.

Dapa Spline is designed to hold the fly mesh screen in place within the aluminium extrusion. The flexibility and durability of the spline allows it to be easily inserted in channels and allows for easy cornering.

CHEMICALS & AEROSOLS

Cerium Oxide



Cerium Oxide is a high grade optical polishing compound used to lessen and polish scratches from mirror bevels, table top edges, glass in vehicles or structures.

Available in: 450g Tub

C-Thru Glass Cleaner



C-Thru removes smears, finger marks, smog, tobacco tar residues and other soil deposits. Leaving a sparkling, streak-free finish.

Available in: 20L Drum

Acetone



Diggers Acetone is an effective clean-up solvent for difficult resins, waxes and adhesives.

Available in: 1L Bottle

Isopropyl



Isopropyl Alcohol is a high quality hard surface cleaner with a high evaporation rate.

Available in: 20L Drum

Methylated Spirits



Apply generously then polish with dry cloth for sparkling glass, ceramic, metal and laminated surfaces. Always test a small area first. Also used when cutting glass pannels with laminated backings.

Available in: 4L Bottle & 20L Drum

White Spirits



White spirit is widely used in alkyd paints and resins, degreasers, dry cleaning fluids, bitumen products, inks, waxes, polishes and as a general purpose solvent and cleaner.

Available in: 1L Bottle & 20L Drum

Saw Wax



Saw Wax Lubricant is a special formulation of solid waxes, use it for all drilling, tapping, sawing, and fastening operations to increase production quality and improve tool life.

Expanding Foam



The AnchorMark Gun Foam is a 1-component insulation and construction polyurethane foam developed to create a seal between construction parts. Fills joints around window frames and in construction, partition walls, ceiling and floor joints.

T51 Spray Adhesive



This product is ideal for fabrics, leathers, carpeting, linoleum, HPL, foam, GRP, plastics and many other

Mirror Edge Sealer



Mirror Edge Sealer is a specially formulated clear coating that reduces mirror deterioration and edge creep caused by excessive humidity, moisture and ammonia based glass cleaners.

Inox Lubricant



This lubricant is made with a high grade white oil, rust inhibitors and other components to give lasting protection from corrosion and oxidation. MX3 will penetrate through bolts and parts that are stuck together to help loosen and easily free up without causing damage.

Silicone Solvent



Silicone solvent removes both cured and uncured silicone from just about any surface without damage. Remove excess silicone sealant with flat knife, blade or spatula. Apply solvent liberally to surface to be cleaned. Wipe dry with clean cloth.

Silicone Spray



A heavy duty lubricant designed to lubricate, waterproof and protect most surfaces from binding, corroding and squeaking. It's an ideal protectant for plastic, vinyl, leather, rubber, window & door tracks, door hinges, metals, fibreglass and locks.

Glass Cleaner



A Powerful water bourne foaming glass cleaner that acts quickly to dissolve and remove dirt, dust, grime, finger marks, nicotine and smoke haze from all sorts of glass surfaces including mirrors and windows leaving the surface crystal clear and free from streaks.

Etch Primer



A single pack epoxy rich Etch Primer formulated to provide outstanding adhesion and protection for all types of ferrous and non-ferrous substrates. It is suitable for mild steel, aluminium, zincalume, galvanized iron, chrome, copper, brass, stainless and other metal alloys.

Boston Spray Paint



Boston spray paint is a quick drying, high gloss enamel paint for interior & exterior surfaces. it dries to a high gloss, tough and durable finish. Works great on metal, wood, fibreglass & glass surfaces.

Gloss Black

Gloss White

Metallic Silver

Yellow

Sky Blue

stocked colours

Other colours available upon request

Touch Up Paint



Anchor Bond is an easy to use acrylic touch up paint, providing excellent durability and adhesion on pre-painted and powder coated surfaces or for painting metal surfaces. Colours are formulated to industry standards.

Anotec Mid Bronze
Anotec Silver Grey
Apo Grey
Basalt
Blue Ridge
Bright White Gloss
Charcoal
Citi Pearl
Classic Cream
Classic White
Cottage Green
Cove


Deep Ocean
Doeskin
Dune
Evening Haze
Gully
Hammersly Brown
Hawthorn Green
Ironstone
Jasper
Magnolia
Mangrove
Manor Red

Monument
Night Sky
Notre Dame
Off White
Oyster
Pale Eucalypt
Paperbark
Pearl White
Precious Silver Pearl
Primrose
Rivergum
Riversand

Satin White
Shale Grey
Shoji White
Stone Beige
Surfmist
Terrain
Wallaby
White Birch
Wilderness
Windspray
Woodland Grey

*Other colours available upon request.

Rollers with Bores

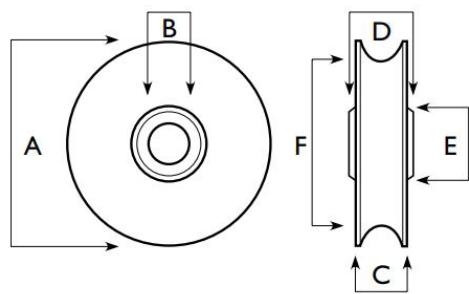

PART	A	B	C	D	E	F	Load (kg)
3-4020	39.0	6.4	5.5	7.0	12.7	31.0	12
3-4030	39.0	6.4	5.5	12.6	12.7	31.0	12
3-4040	38.0	6.4	8.4	9.5	12.0	32.0	30
3-4050	36.0	6.4	7.5	9.5	12.0	28.0	30
3-4060	32.0	6.4	8.0	9.5	12.0	27.0	25
3-4068	32.0	6.4	8.0	9.5	12.0	27.0	35
3-4200	33.0	6.4	8.4	9.5	12.0	27.0	35
3-4660	25.0	6.4	7.0	9.0	10.5	20.2	15
3-4670	31.0	6.4	9.0	10.2	14.0	Flat	30


DAMESA
INDUSTRIES

Roller Carriages
Catalogue

DAMESA
INDUSTRIES

Individual Rollers
Catalogue

Rollers with Axles

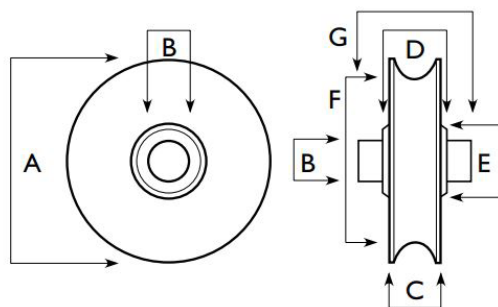

PART	A	B	C	D	E	F	G	Load KG
3-4130	36.0	6.4	8.0	9.6	12.0	28.0	14.3	25
3-4135	35.0	6.4	9.4	9.6	12.0	30.0	13.9	25
3-4138	36.0	6.4	8.0	9.0	12.0	28.0	17.0	35
3-4140	32.0	6.4	8.0	9.6	12.0	26.0	15.5	25
3-4141	32.0	6.4	8.0	10.0	12.0	26.0	14.4	25
3-4142	32.0	6.4	8.0	10.0	11.8	26.0	14.5	35
3-4143	32.0	6.4	8.0	10.0	11.8	26.0	14.5	35
3-4145	31.0	6.4	8.0	9.0	12.7	25.6	12.0	25
3-4148	32.0	6.4	8.0	10.0	11.8	26.0	14.5	35
3-4149	32.0	6.4	8.0	10.0	11.8	26.0	14.5	40
3-4150	23.0	3.0	8.5	9.0	6.0	17.0	11.5	15
3-4160	32.0	4.8	8.0	9.6	12.0	26.0	15.5	25
3-4170	29.0	4.2	8.0	8.4	10.5	24.0	11.4	15
3-4180	27.0	5.0	5.2	6.0	12.5	24.0	9.1	15
3-4190	16.0	3.2	4.6	6.4	5.2	14.0	9.0	12
3-4191	16.0	3.2	5.0	6.0	7.5	11.7	9.0	12
3-4192	16.6	3.2	5.0	6.6	8.0	13.8	10.1	12
3-4210	31.7	6.4	7.6	9.6	12.0	26.0	15.6	35
3-4220	25.0	4.6	6.0	6.6	8.8	22.8	10.7	25
3-4240	21.0	6.4	7.0	9.0	10.5	20.5	12.6	12
3-4250	23.6	5.0	6.8	7.5	9.5	18.0	10.0	12
3-4251	24.0	4.4	6.9	7.4	8.0	19.0	9.8	12

GLAZING TOOLS

Hacking Knife



Made in Germany (Bohle), has a plastic ergonomic handle, width 30 mm and Blade length 95 mm.

Curved Putty Knife



Made in Germany. Blunt, curved, highly polished, continuous blade with brown polished wooden handle. Blade length 95 mm.

18mm Putty Knife



Made in Germany. 18mm highly polished, continuous blade with brown polished wooden handle.

26mm Putty Knife



Made in Germany. 26mm highly polished, continuous blade with brown polished wooden handle.

Red Devil 1½" Putty Knife



Black nylon solvent-resistant handle with a high-carbon, precision-ground steel blade that is lacquered to prevent rust.

Red Devil Scrape and Pry Bar



For professional and general use. Multi-purpose tool with Chisel edge on both ends. Finest hardened, tempered steel.

18mm Cutting Knife



Original Olfa quality knife, stainless steel blade guide and blade 18mm width.

Retractable Knife



Automatic blade retracting system reduces injuries, die cast all metal construction for maximum strength.

Universal Shears



For cutting carpet gripper and small PVC and timber mouldings. Replaceable blade and anvil available.

Maccsim Caulking Gun



Skeleton caulking gun with automatic sealant stop. For 310ml cartridges.

Albion Caulking Gun



Full sized handle for comfort and efficient dispensing, built-in cartridge puncture wire and ladder hook pull. Designed for thicker materials.

Heavy Duty Caulking Gun



For applying 310 ml cartridges, easy to use and quick feed with quick-release device.

Bostik Barrel Gun



The Application Barrel Gun has a 37cm long aluminium barrel that is used for 600ml sausages.

Thor Nylon Hammer



Due to the easily interchangeable heads, this multi purpose striking tool can be used in many assembly applications.

Thor Mallet



The white head on this mallet will not leave marks on work surfaces. Ideal for window frame manufacturers & shop fitting.

Woods Glass Sucker



Fast attachment on smooth, nonporous flat surfaces. Release valve lever permits quick and complete release. 57 kg per vacuum cup.

Double Vacuum Glass Sucker



This suction lifter is suitable for all materials with flat, airtight surfaces. Load capacity 60Kg.

Butterfly Glass Sucker



Single vacuum lifter is easy-to-attach with its split-handle design for one-hand operation. Pad lifts up to 30 kg.

Glass Circle Cutter



Improved break quality even for small radii, long service life, less cutting pressure, minimum cutting diameter 72mm.

Speed Cutter



For quick and easy cutting of large glass panes, with integrated supply of cutting fluid. 600mm & 1200mm available.

Toyo Glass Cutter



Known for its long wheel life, this cutter was built to last, and make the cleanest scores in glass cutting today.

Glass Pliers



The flat upper jaw supports the top surface of the glass, while the lower hooked jaw enables glass to be cleanly opened at the cut.

Glazing Square



These L-squares are manufactured in one piece from high-quality material. The integrated brace ensures especially high precision.

Glazing Shovel/Paddle



Use of glazing shovel/paddle will minimize cracking or damaging of glass when maneuvering panes into position.

Spline Roller



Ergonomic powder-coated aluminium handle & nylon wheel for inserting spline into fly screens.

Wedge Roller



The Wedge Roller tool aids in the insertion of Glazing Vinyls and Gaskets in window assemblies and heavy aluminium base shoe.

Wilde Hook Tool



This tool is it great for gasket work, cleaning glass chips out of gaskets, 'unlocking' weatherstrips, or for pulling cotter pins.

Plews Gun



For use in dispensing adhesives, sealers, primers or lubricants. Can be easily disassembled for cleaning. 470ml capacity

Metho Squeeze Bottle




500ml squeeze bottle for dispensing Methylated Spirits.

Würth Pump Spray Bottle



Special suction system allows 360° spraying for reliable overhead, diagonal or vertical operation. Capacity: 1L

Silicone Spreader/Spatula



Made of a flexible material that doesn't stick to silicone and other sealants. Different sizes and stiffnesses available.

Hand Stapler



Heavy duty, trade quality aluminium die-cast multi-function Staple Gun with power adjustment control system.

Fluro Tape Measure



Strong and versatile, clear graduated markings and Hi-Vis colours to locate quicker in a toolbox.

Ultimax Tape Measure



Double sided blade printing, high impact resistant ABS casing with non-slip grip and 25mm wide blade for super standout.

Allen Key Set



Imperial & Metric sets available, ball point allows for up to 25° entry angle and comes in a double layer holder.

Riveting Tool



3 interchangeable nozzels with a range from 3.2mm to 6.4mm rivets and is suitable for both aluminium and stainless steel rivets.

Battery Operated Riveter



EB-50
Capacity: 2.4mm to 5mm rivets

Comes in a plastic carry case. Extra batteries available.

Pneumatic Riveter



RL-2
Capacity: 2.8mm to 4.8 rivets
Pressure: 70 to 100Psi
Weight: 1.34Kg

AnchorMark Foam Gun



The AnchorMark foam gun meets the tough requirements of a construction site and thus offers a long lifespan.

PERSONAL PROTECTIVE EQUIPMENT

Clear Safety Specs



Classic and popular lightweight design. Hard Coat lens with Anti-Scratch and Anti-Fog. 99.9% UV Protection.

Smoke Safety Specs



Classic and popular lightweight design. Hard Coat lens with Anti-Scratch and Anti-Fog. 99.9% UV Protection. Smoked for Anti-Glare.

EVOLVE Safety Specs



Unique clip-off frames with interchangeable headband strap. Anti-Scratch on the outside, Anti-Fog Coat on the inside!

Earplugs



The disposable earplug has a very high sound absorption. Class 5, 26dB. Available corded or uncorded.

Banded Earplugs



Washable, reusable and replaceable ear pods. Lightweight & durable. Class 3, 19dB.

Earmuffs



Shock resistant and durable construction, can be worn behind the head for use with hard hat. Class 5, 28dB.

Black Nitrile Disposable Gloves



Made from 100% nitrile, powder free and latex free, low sweat technology for extended use and textured fingers for extra grip.

Black Knight Gloves



Black Knight Gripmaster Glove has excellent grip in wet, oily environments.

Glass Gloves Green



Extremely durable offering excellent abrasion tear and puncture resistance. The crinkle finish coating provides superior grip.

Mesh Glazing Gauntlets



These Nylon Wrist Protectors help protect you from cuts and abrasions while working with glass.

Glove Clip



The Glove Clip is ideal for gripping your gloves, earmuffs, helmets, towels etc.

P2 Respirator Mask



Suitable for medical, soldering, welding, grinding, sanding and dusty environments.

DRILL BITS



HSS Drill Bit

From 1.0mm to 13.5mm
(In 0.1mm increments)

From No:40 to No:7

From 1/64" to 1/2"

Available in Cobalt upon request



HSS Drill Bit - Double Ended

Available sizes: 1/8", No:30, No:20 & No:11

Available in Cobalt upon request



HSS Drill Bit - Long

From 2.0mm to 13.0mm
(In 5mm increments)

From 5/64" to 1/2"



HSS Drill Bit - Reduced Shank

From **10.5mm to 32.0mm**
(In 5mm increments)

From **13/32" to 1 1/4"**


10.0mm and 12.7mm Shanks



HSS Step Drill Bit

4mm to 20mm
(In 2mm increments)

8mm Hex Shank

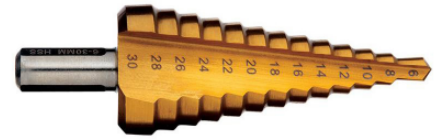

HSS Step Drill Bit

6mm to 30mm
(In 2mm increments)

10mm Hex Shank



Glass & Tile Drill Bit

Available sizes: **3mm, 4mm, 5mm, 6mm, 6.5mm, 8mm, 10mm and 12mm**

Premium Tungsten Carbide quad tip for faster and superior drilling.



Diamond Tip Drill Bit

Available sizes: **5mm, 6mm, 6.5mm, 8mm, 10mm, 12mm, 15mm, 20mm, 25mm, 30mm and 35mm**

Sizes 6mm - 12mm have a wax core for aiding in cooling and lubrication.



Spade Drill Bit

Sizes from **6mm to 40mm**.
(In varying increments)

Non-slip 1/4" quick change shank.



Countersinking Drill - 3 Flute

Available sizes: **6.3mm, 8.3mm, 10.4mm, 12.4mm, 16.5mm, 20.5mm, 25mm, 30mm and 40mm**.

Better suited to machine use over powerdrill.



Countersinking Drill - 5 Flute

Available sizes: **8mm, 12mm, 16mm and 20mm**.

Better suited to powerdrill use over machine work.



Countersinking Drill - Crosshole

Available sizes: **10mm, 14mm, 21.5mm, 28mm, 35mm and 44mm**.

Better suited to powerdrill use over machine work.



Small Holesaw Arber

Suits holesaws from **14mm to 30mm**.

11/32" quick change shank to suit 10mm chuck.



Large Holesaw Arber

Suits holesaws from **32mm to 250mm**.

7/16" hex shank to suit 13mm chuck.



Bi-Metal Holesaw

Sizes from **14mm to 250mm**.
(In varying increments)

Engineered for heavy duty industrial applications and smooth accurate cuts.



Masonry Drill Bit

Various sizes ranging from **3mm** to **20mm**

Suitable for rotary and impact drills with a standard jaw chuck



Masonry Drill Bit - SDS Shank

Various sizes ranging from **5mm** to **52mm**

Only suitable for SDS rotary hammer drills



Metric Drill Kit

Kit sizes available:

13pc, 19pc, 25pc, 85pc, and 100pc

Both slim kits and tough boxes available for **most** sizes.



Imperial Drill Kit

Kit sizes available:
13pc, 21pc and 29pc

Both slim kits and tough boxes available for **most** sizes.



Holesaw Drill Kit

Kit sizes available:
11pc, 13pc, 16pc, 19pc and 21pc

Various sizes per kit, give us a call for more information.



Spade Drill Kit

8pc kit featuring a 10mm, 12mm, 16mm, 20mm, 22mm, 25mm and 32mm spade bit and 1x 150mm QR extension.

DRIVER BITS



Phillips Driver Bit

Available sizes: **PH1**, **PH2** and **PH3**.

Available lengths: 25mm, 50mm, 75mm, 100mm and 150mm.



Pozi Driver Bit

Available sizes: **PZ1**, **PZ2** and **PZ3**.

Available lengths: 50mm, 75mm, 90mm and 150mm.



Square Driver Bit

Available sizes: **SQ1**, **SQ2** and **SQ3**.

Available lengths: 50mm, 75mm, 100mm and 150mm.



Hex Driver Bit

Available sizes: **HEX2**, **HEX2.5**, **HEX3**, **HEX4**, **HEX5**, **HEX6**, **HEX8** and **HEX10**.

Available lengths: 25mm and 50mm
HEX5 & HEX6 also available in 150mm.



Torx Driver Bit

Available sizes: **T10**, **T15**, **T20**, **T25**, **T30** and **T40**.

Available lengths: 25mm, 50mm and 75mm. T30 also available in 100mm

Most sizes available as an Impact Driver bit.



Nutsetter Driver Bit

Available sizes: **1/4"**, **5/16"** and **3/8"**

Available lengths: 42mm, 65mm and 100mm.

5/16" also available in 150mm, 200mm and 300mm.



Hex to Socket Adapter

Available in **1/4"**, **3/8"** and **1/2"** socket.

Available lengths:
1/4" - 75mm, 100mm and 150mm.

3/8" & 1/2" - 75mm.



Magnetic Bit Holder

Available in **1/4"**

Available lengths: 55mm, 75mm,
150mm and 300mm.



Quick Release Bit Holder

Available in **1/4"**

Available lengths: 65mm and 150mm.

Spring loaded quick release.



Pentaforce Security Driver Bit

Available sizes: **PFD-1B**, **PFD-2B** and
PFD-3B.

Only available in a 50mm length.

***You must register your business or be
registered to purchase this security bit.**



Resytork Driver Bit

Available sizes: **T10**, **T15**, **T20**, **T25**, **T30**
and **T40**.

Available lengths: 25mm, 50mm and
75mm.



Hex Security Driver Bit

Available sizes: **HEX2**, **HEX2.5**, **HEX3**,
HEX4, **HEX5** and **HEX6**.

Only available in a 25mm length.



Impact Phillips Driver Bit

Available sizes: **PH1**, **PH2** and **PH3**.

Available lengths: 25mm, 50mm, 75mm,
100mm and 150mm.



Impact Square Driver Bit

Available sizes: **SQ1**, **SQ2** and **SQ3**.

Available lengths: 50mm, SQ2 is also
available in 25mm, 75mm, 100mm and
150mm.



Impact Hex Driver Bit

Available sizes: **HEX4**, **HEX5** and **HEX6**

Available lengths: 50mm, HEX5 is also
available in 25mm & 75mm.



Impact Nutsetter Driver Bit

Available sizes: **1/4"**, **5/16"** and **3/8"**

Available lengths: 42mm, 65mm and
100mm.



Impact Hex to Socket Adapter

Available in **1/4"**, **3/8"** and **1/2"** socket.

Available lengths:
65mm only.



Security Driver Bit Set

Kit includes: Philips, Pozi, Pin, Slot,
Square, Spline, Clutch, Torq, Resytork,
Hex, Hex Pin and many more.

Kit also includes: 1 x Magnetic Bit
Holder, 1 x Socket Bit Holder, 1 x Wing
Nut Driver

Notes:

[illegible]

To view our website



Scan here!



Jenall Pty Ltd trading as
Damesa Industries

5 Silva Ave, Queanbeyan NSW
sales@damesa.com.au
02 6297 1913